

# Anaren

## Model 74129

### Mixers

#### Double Balanced

### Applications

- Wideband Down Converters
- Wideband Up Converters
- Balanced Modulators
- Bi-Phase Modulators
- Phase Detectors



### Features


- Extremely Wide IF Bandwidth
- Excellent LO/RF Isolation
- Multi-Octave Performance
- Good Intercept Point
- Miniature Size
- Connectors Per MIL-C-39012

### Electrical Specifications

Frequency GHz	Isolation <sub>LO-RF</sub> dB Min/Typ	Convers. Loss dB Max/Typ	VSWR, <sub>RF</sub> Typ : 1
5.0 - 18.0	28/38	10.5/8.5	4.5
IF Freq. <sup>1</sup> MHz	RF Power <sup>2</sup> Input dBm	LO Power dBm Nominal	
DC-2500	+4	+12	

**Notes:** Impedance: 50 ohms nominal. Meets MIL-E-5400 Class 3 requirements. Additional screening available for military and space applications. 1) Upper IF frequency is the -3 dB response point. 2) At 1dB Compression point **Electrical and Mechanical Specifications subject to change without notice.**

### Outline Drawing

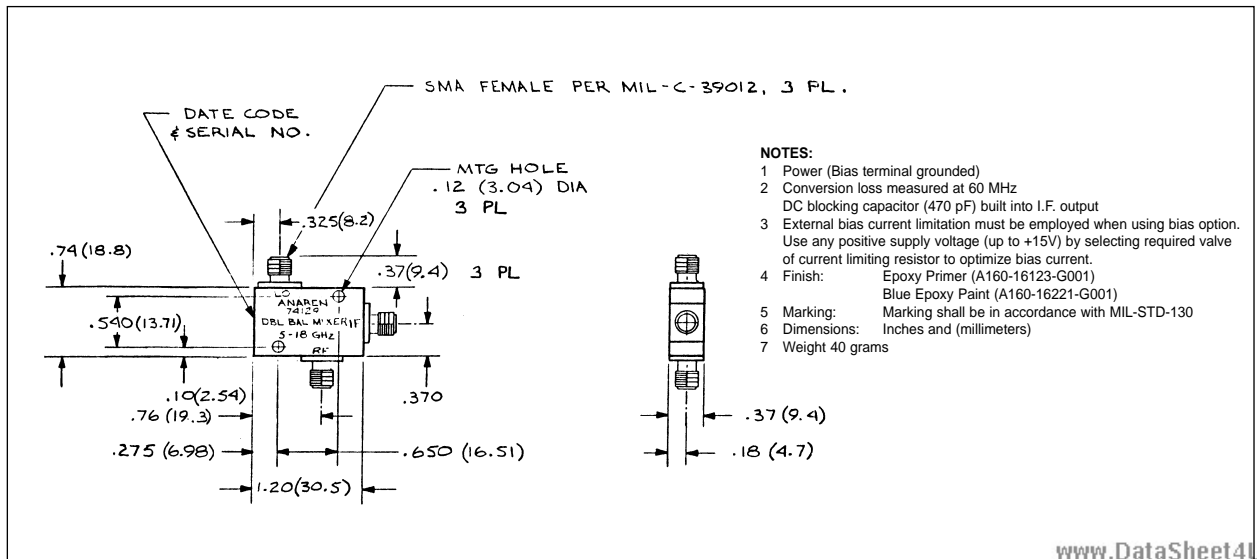

www.DataSheet4U.com

Sales Desk USA: Voice: (800) 544-2414 Fax: (315) 432-9121  
Sales Desk Europe: Voice: (+44) 23 92 232392 Fax: (+44) 23 92 251369

**Anaren**  
What'll we think of next?™

6.6.37