

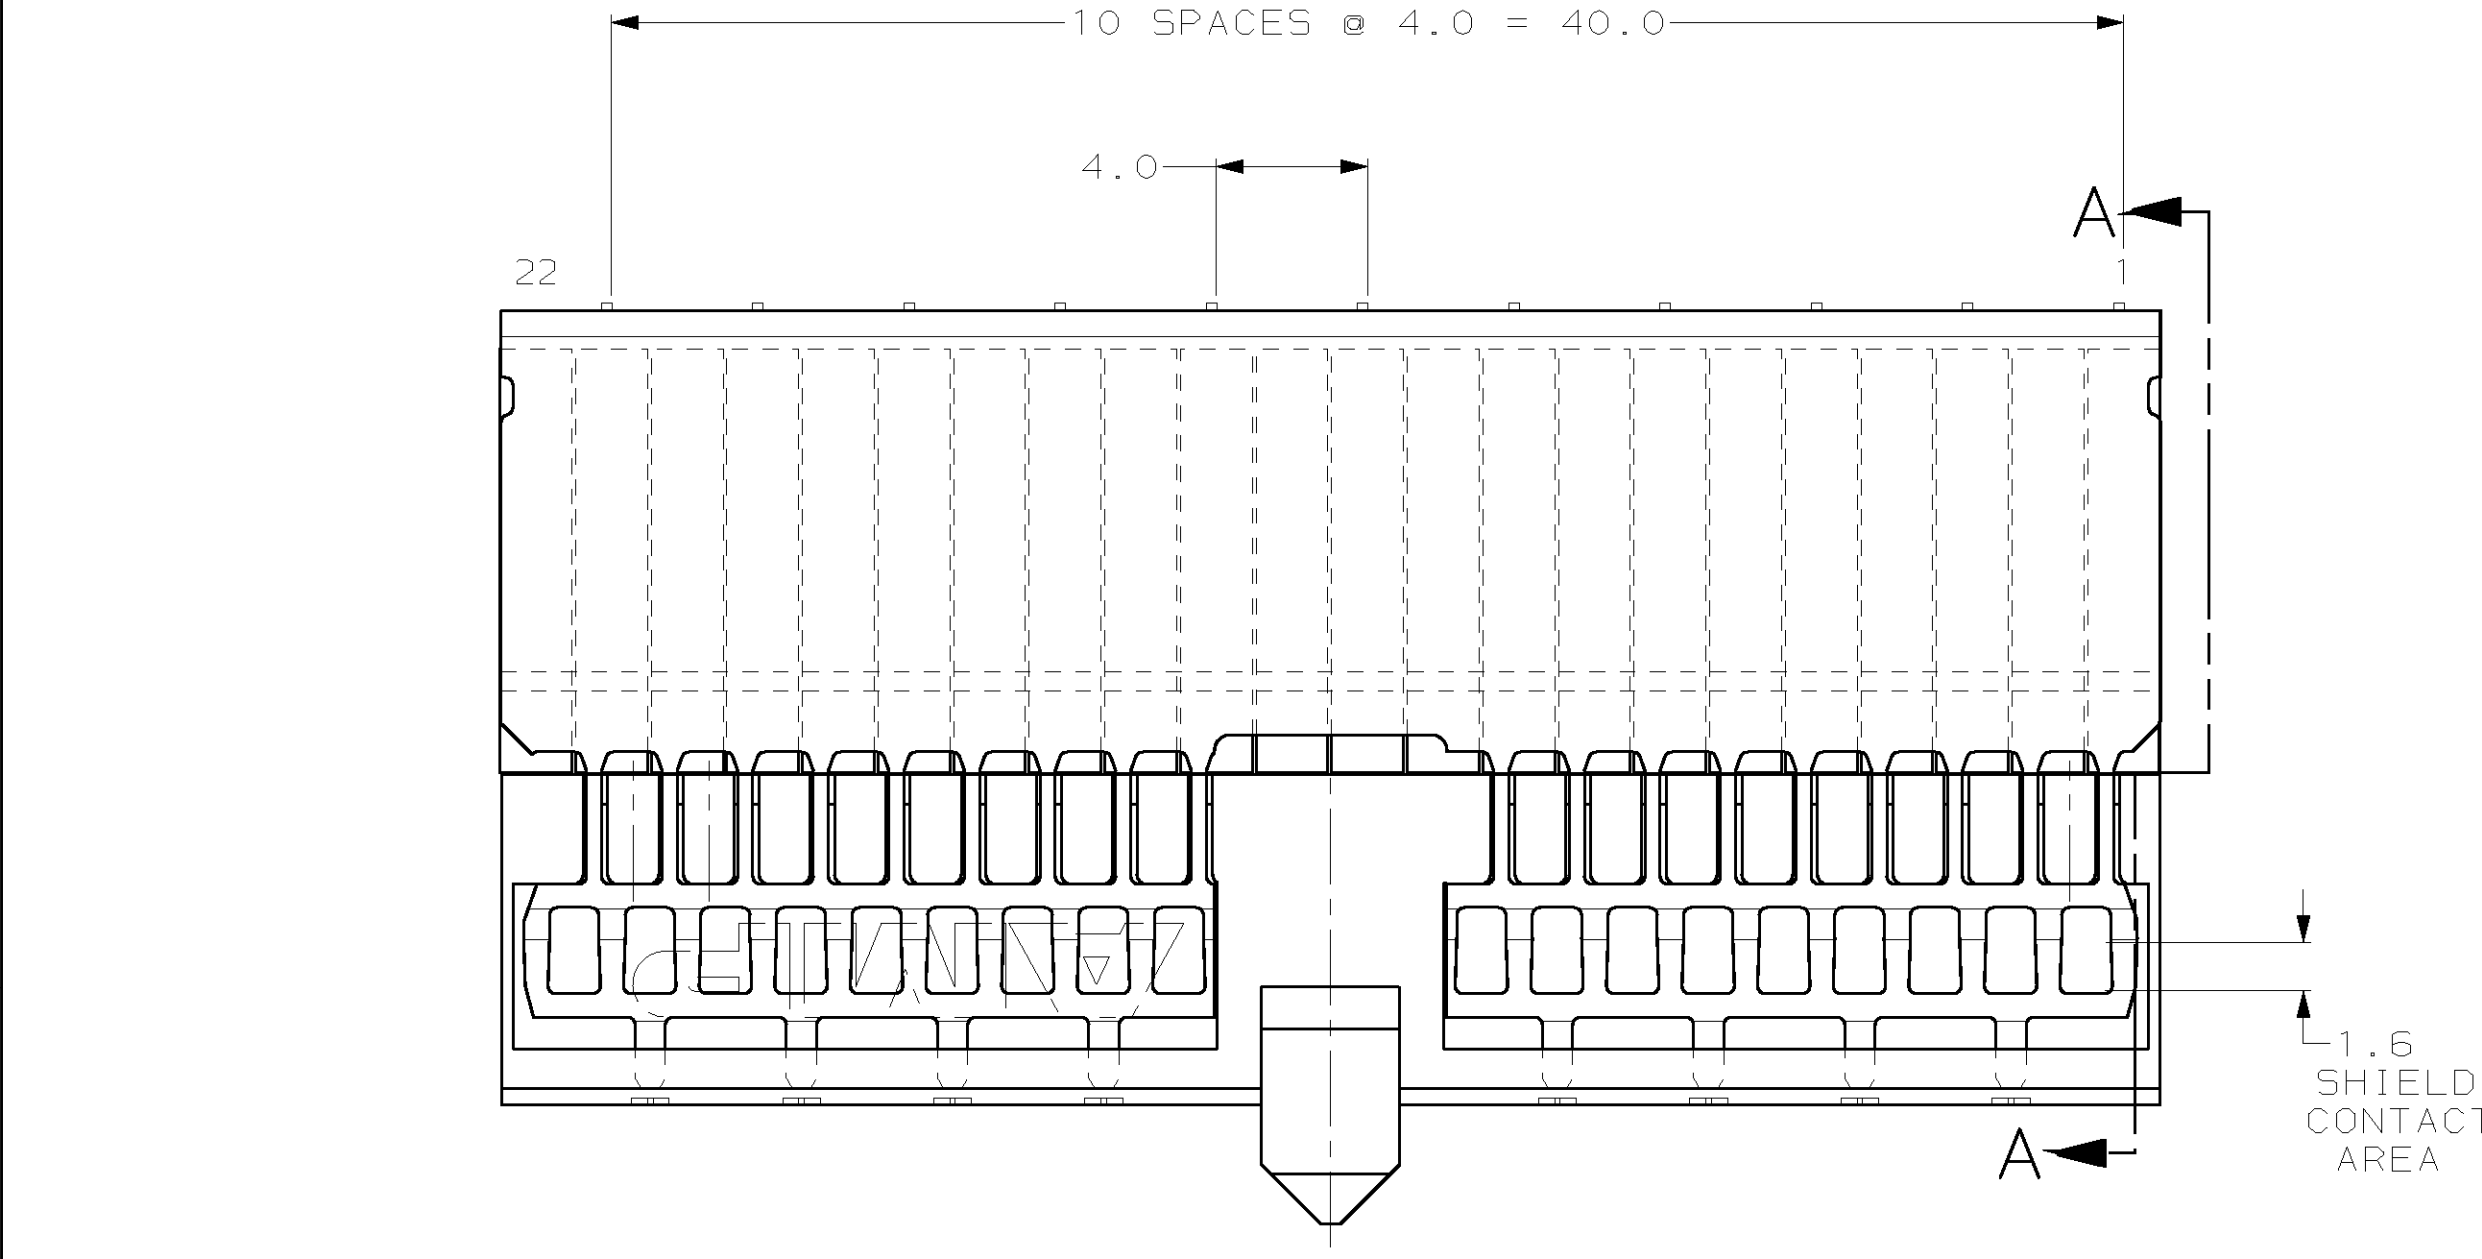
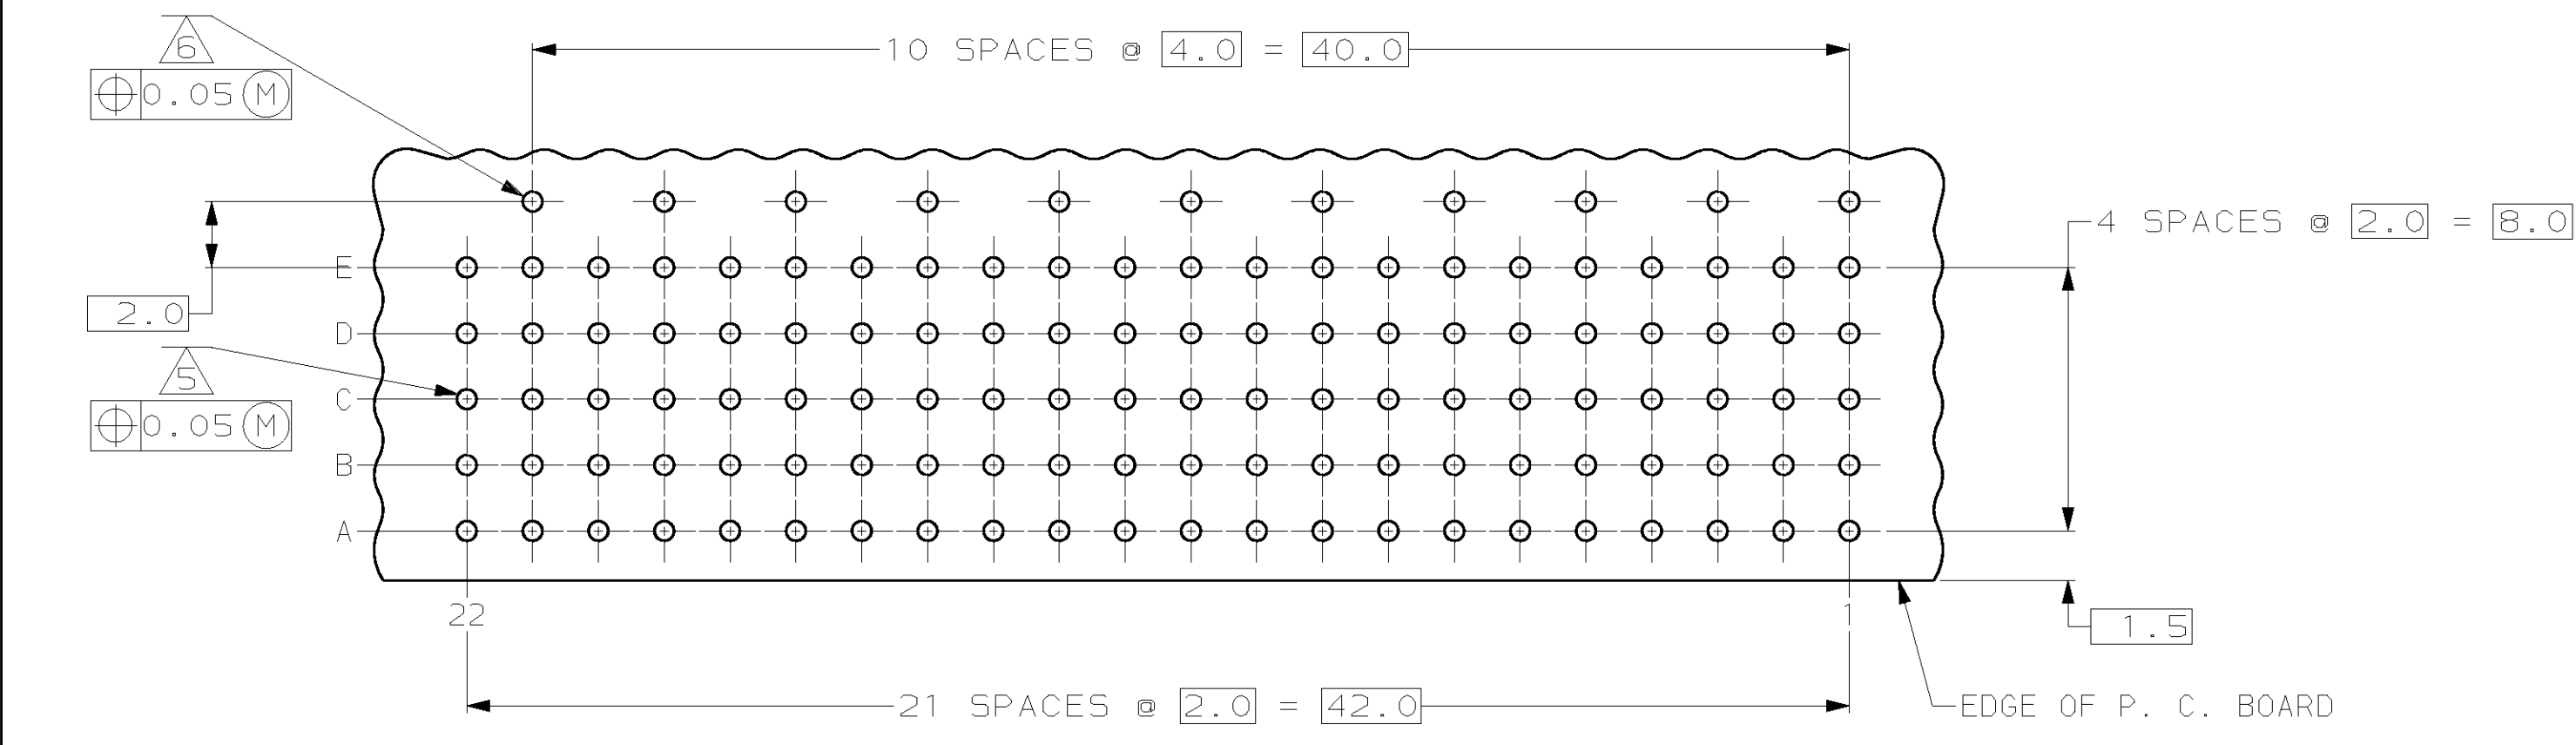
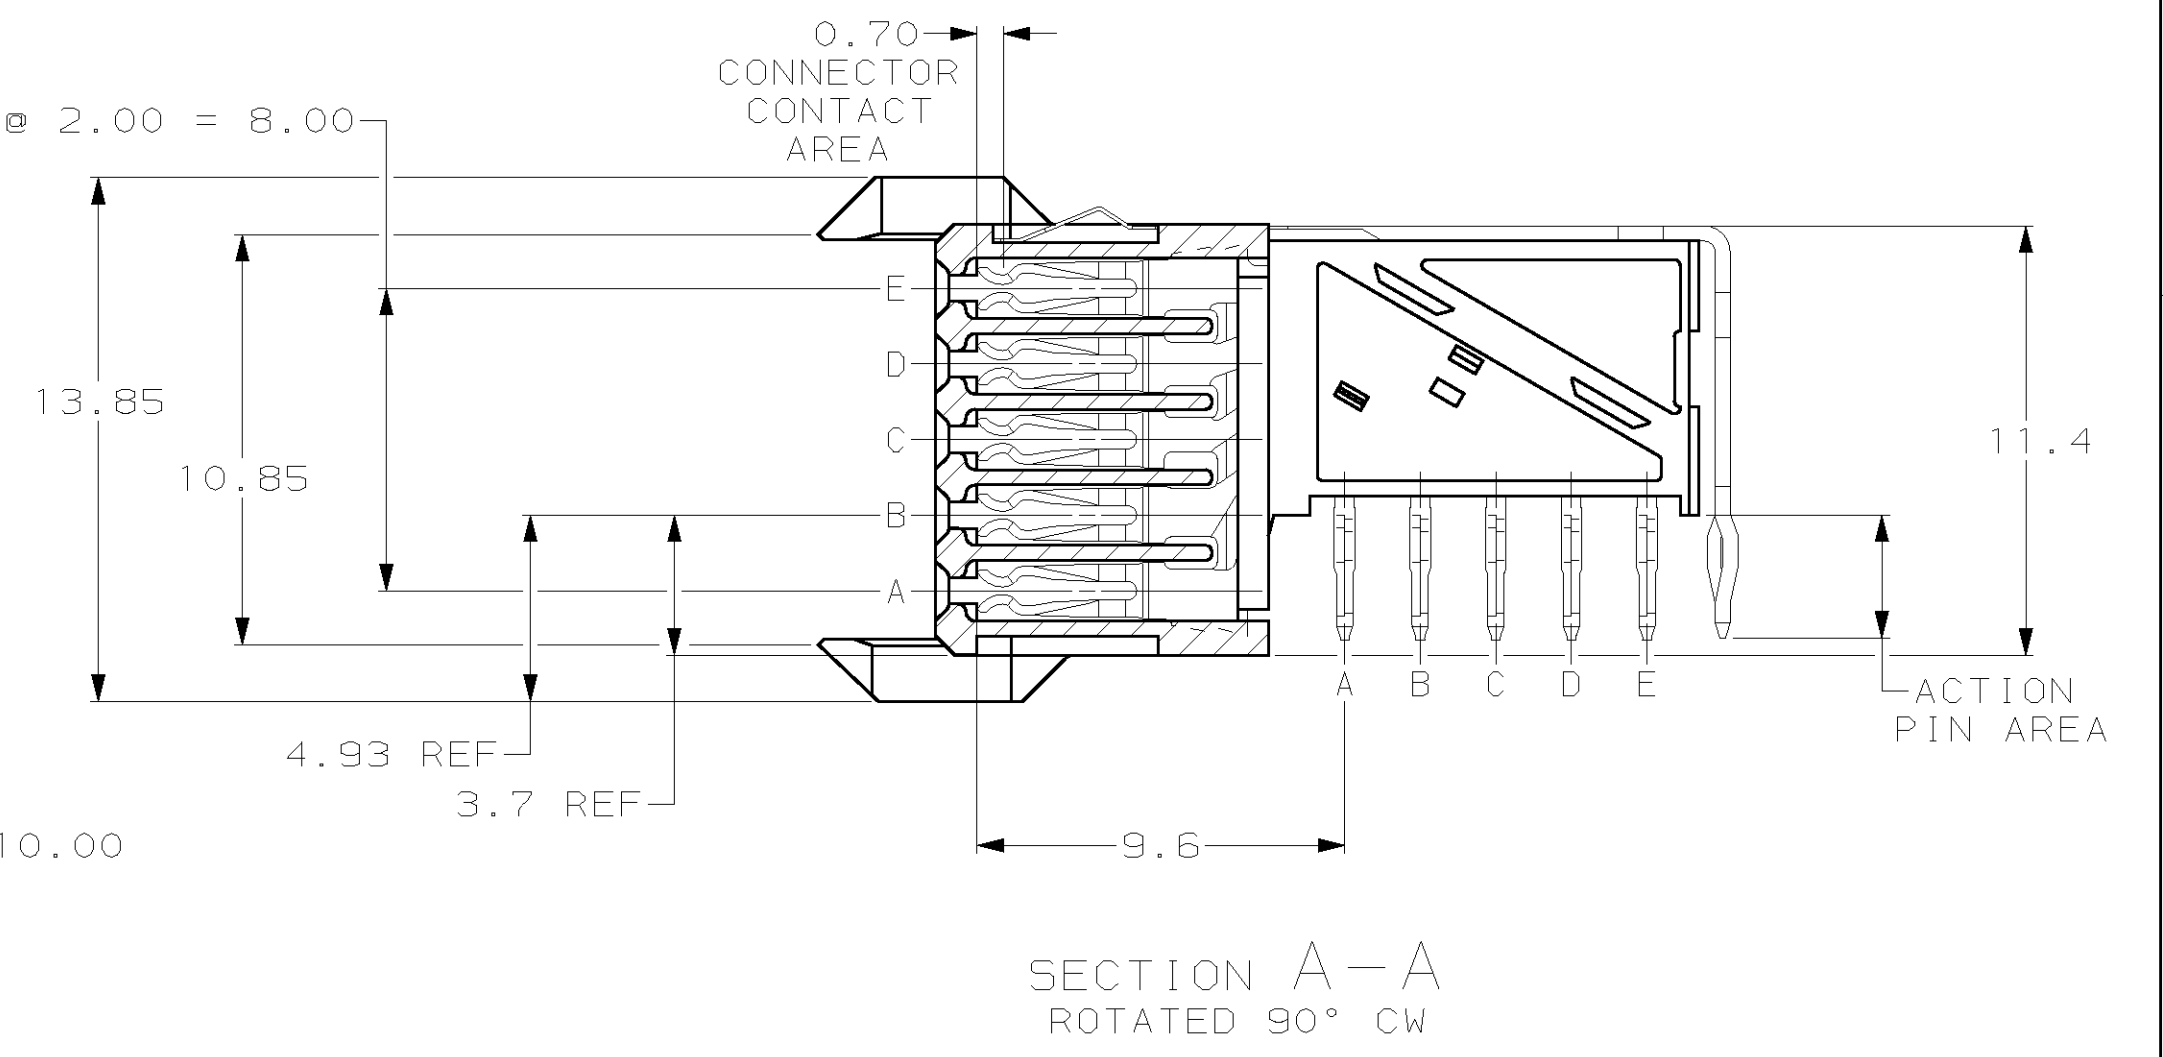


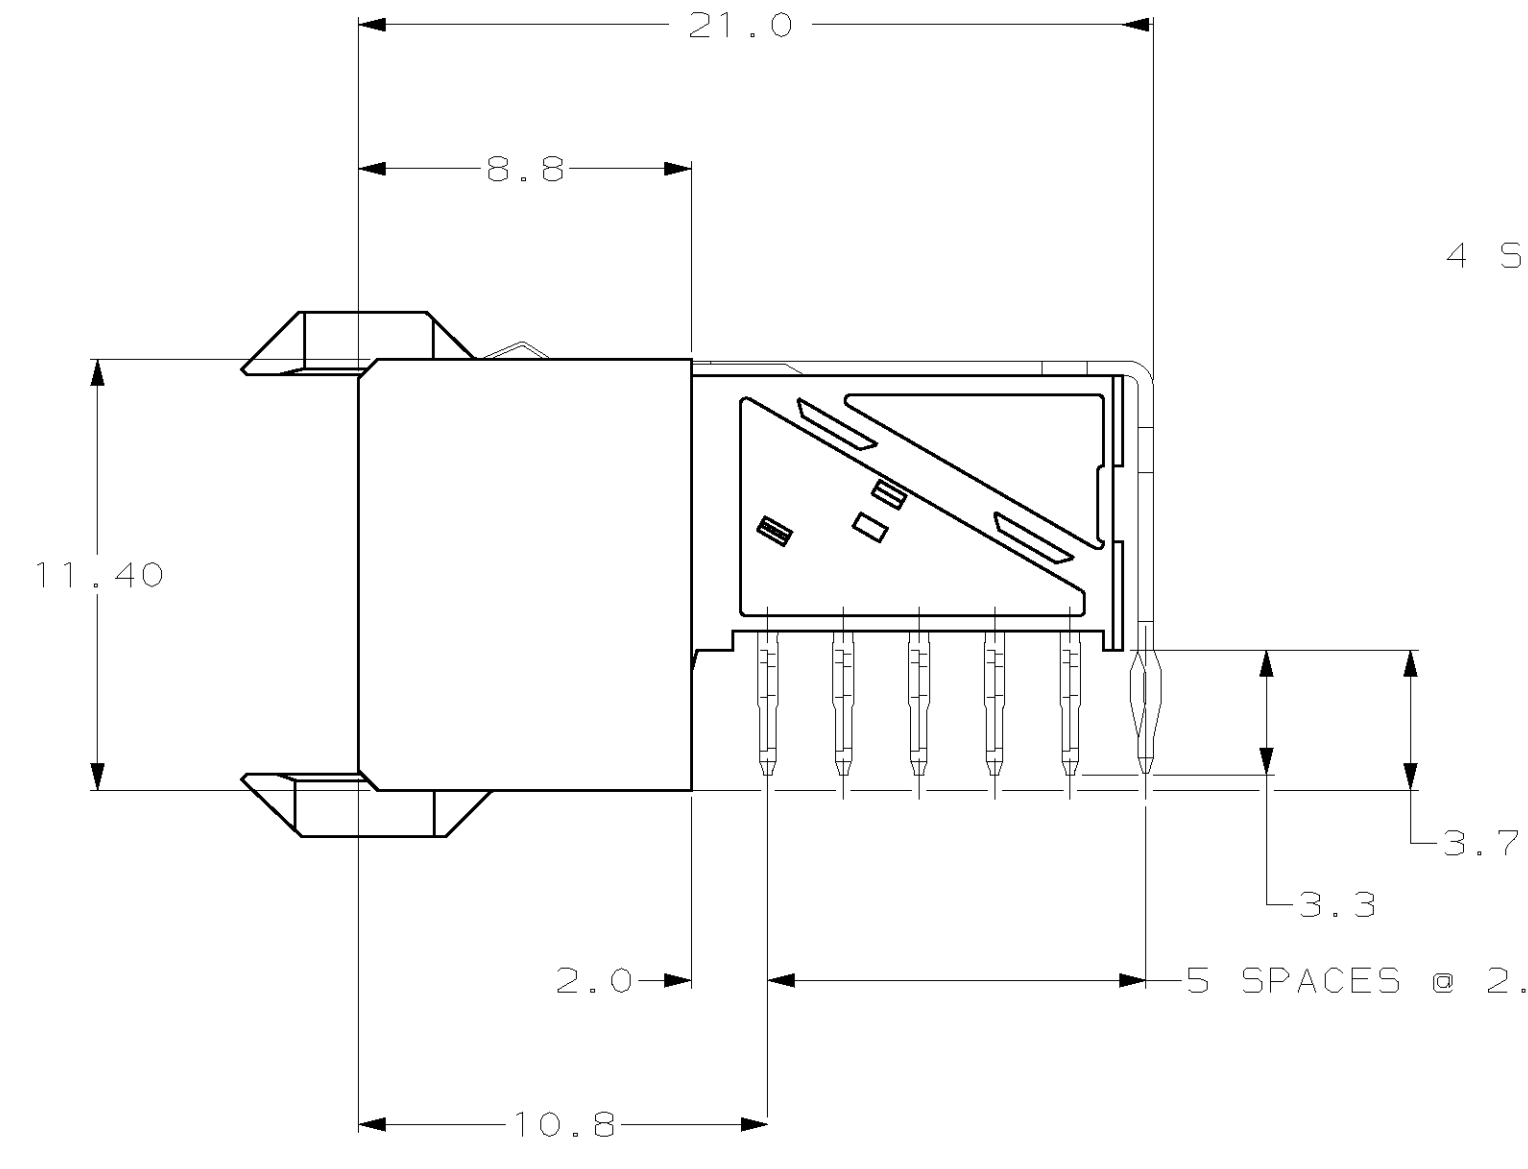

- 1. PLATING CONTACT AREA: 0.8µm Au MIN. OVER 1.3µm Ni MIN. ACTION PIN, 0.5µm SnPb MIN. OVER 1.3µm Ni MIN.
- 2. MATERIAL CONTACT: PHOSPHORBRONZE.
- 3. MATERIAL HOUSING: GLASSFILLED POLYESTER, COLOR: GRAY.
- 4. PART NUMBER AND DATE CODE MARKED LOWEST LEVEL OF PACKAGING.
- 5. PLATED THROUGH HOLES AT 2mm x 2mm SQUARE GRID, 100 HOLES.
P. C. BOARD HOLES ARE AS FOLLOWS:
DRILLED HOLE: 0.700±0.025.
FINISHED HOLE: 0.55 - 0.65.
COPPER THICKNESS: 0.025 - 0.050.
TIN-LEAD THICKNESS: 0.004 - 0.010 (OPTIONAL).
- 6. 10 PLATED THROUGH HOLES FOR UPPER SHIELD ,ROW F.
- 7. SHIELD MOUNTED TO CONNECTOR WITH DOUBLE SIDED ADHESIVE TAPE.

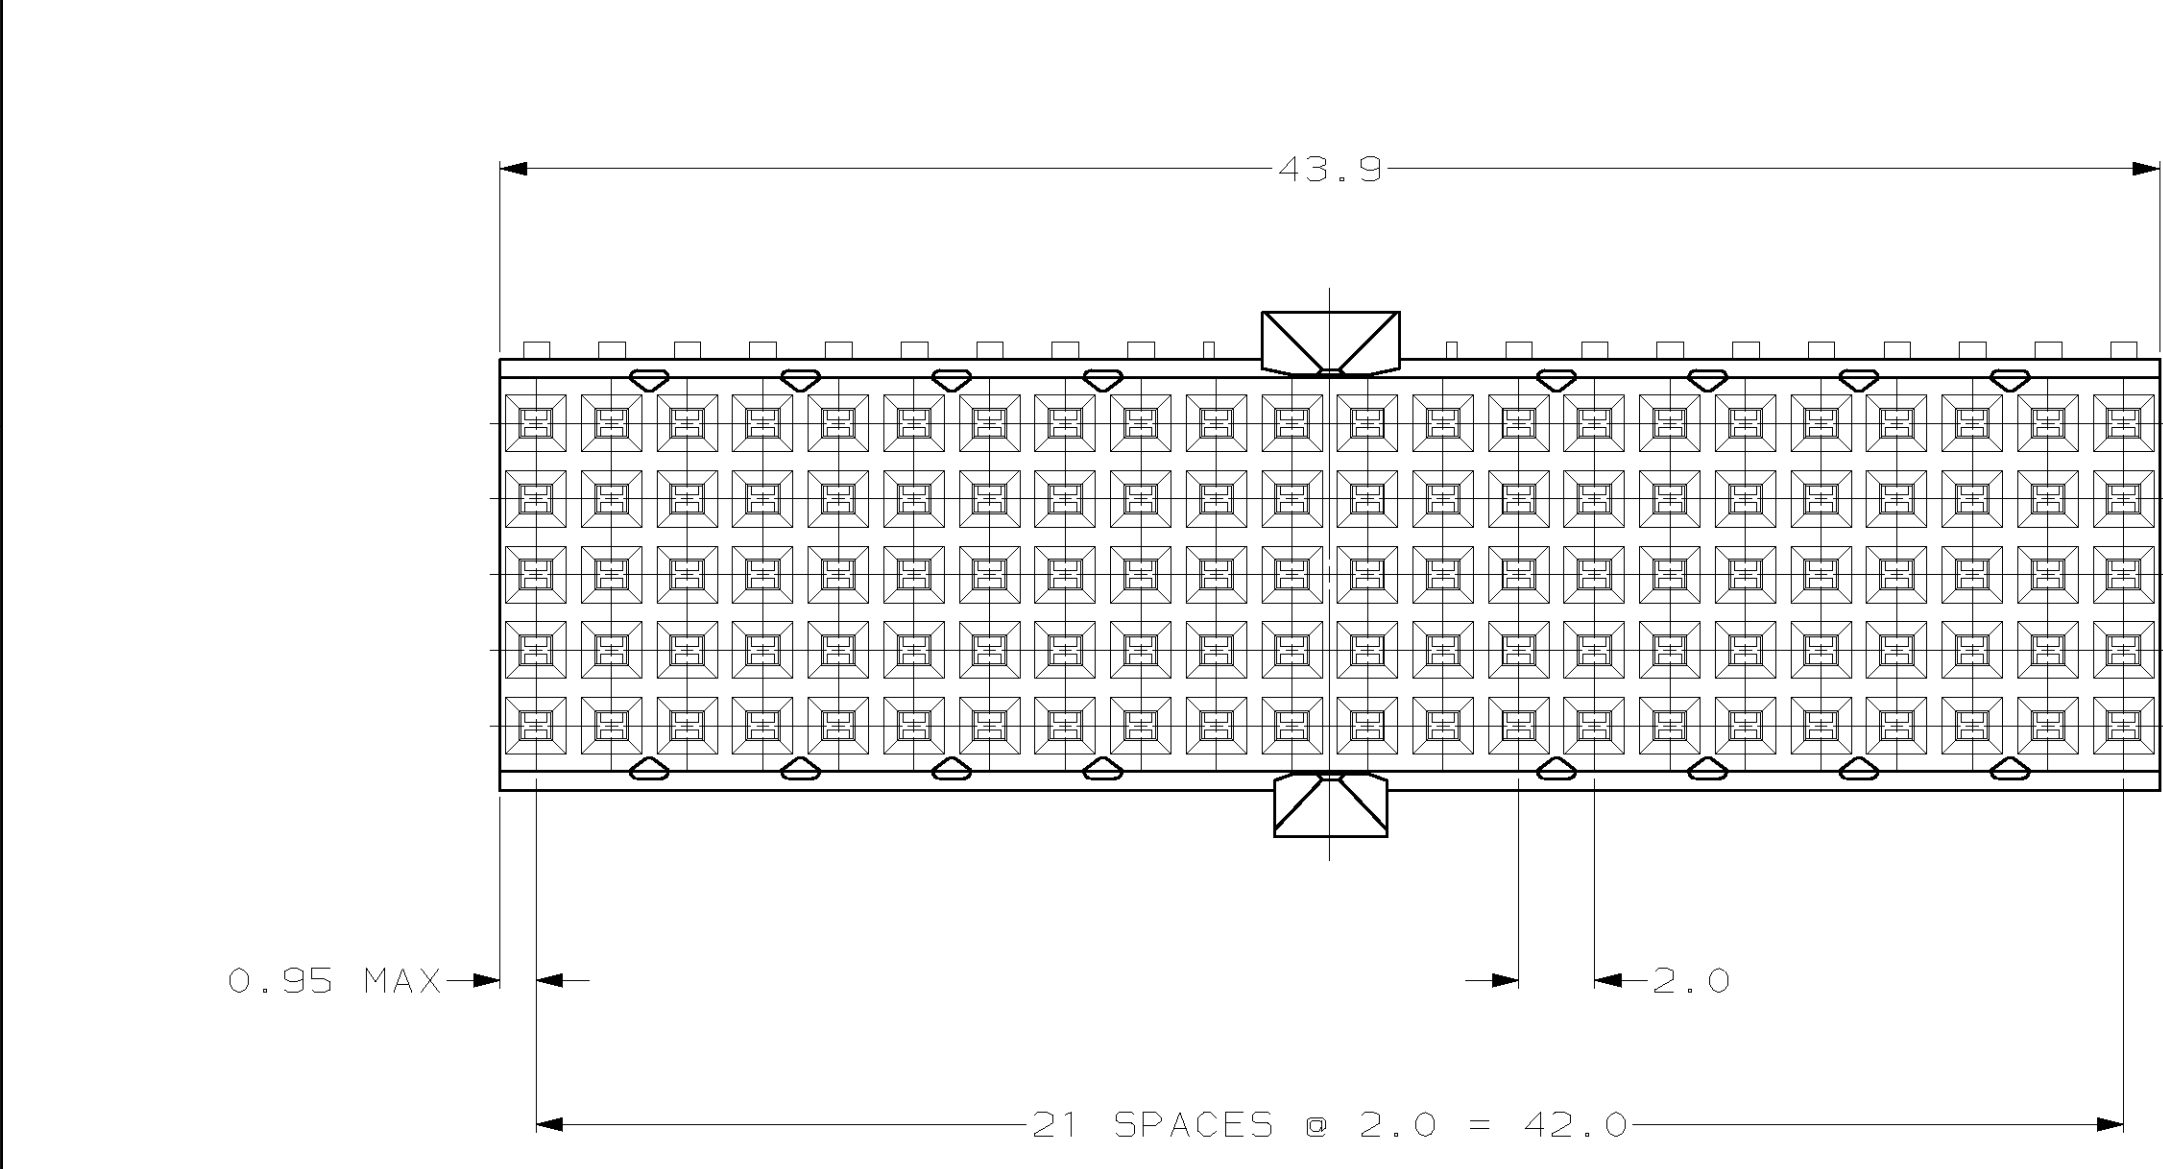

RECOMMENDED P. C. BOARD LAYOUT
COMPONENT SIDE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

MATERIAL

1 2 3

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC

±

1 PLC

±0.2

2 PLC

±0.02

3 PLC

±

4 PLC

±

ANGLES

±

4

FINISH

3

DWN

T. SHUEY

6-22-98

CHK

G. SKIPPER

1-27-99

APP'D

G. SKIPPER

1-27-99

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

-

CUSTOMER DRAWING

NAME

RECEPTACLE ASSEMBLY, Z-PACK 2mm HM, TYPE A/B, PRE-SHIELDED, 110 POSITION

SIZE

CAGE CODE

DRAWING NO

A100779

RESTRICTED TO

www.DataSheet4U.com

SCALE

5:1

SHEET

1

OF

1

REV

A

646489-1

PART NUMBER

AMP

AMP Incorporated

Harrisburg, PA 17105-3608