


### PRODUCT FEATURES

- $R_{DS(ON).typ}=1.8m\Omega@V_{GS}=10V$
- 175°C junction temperature
- Low Gate Charge Minimize Switching Loss
- Fast Recovery body Diode
- 20K  $\Omega$  Gate Protected Resistance Inside

### APPLICATIONS

- High efficiency DC/DC Converters
- ISG EV Products
- UPS inverter

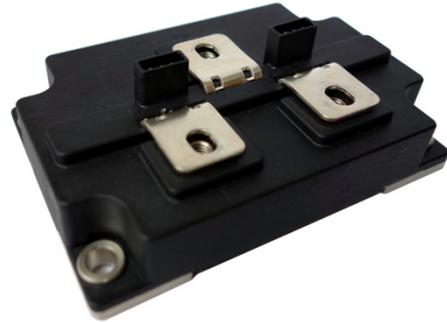

Type	$V_{DS}$	$I_D$	$R_{DS(ON).max}$ $T_J=25^\circ C$	$T_{Jmax}$	Marking	Package
MMN600DB015B	150V	600A	2.1m $\Omega$	175°C	MMN600DB015B	NDB

### ABSOLUTE MAXIMUM RATINGS

$T_C=25^\circ C$  unless otherwise specified

Symbol	Parameter/Test Conditions	Values	Unit	
$V_{DSS}$	Drain Source Voltage	$T_J=25^\circ C$	150	V
$V_{GSS}$	Gate Source Voltage		$\pm 20$	
$I_D$	Continuous Drain Current	$T_C=25^\circ C$	850	A
		$T_C=100^\circ C$	600	
$I_{DM}$	Pulsed Drain Current at $V_{GS}=10V$	Limited by $T_{Jmax}$	1700	
$P_D$	Maximum Power Dissipation		1500	W

### THERMAL AND MODULE CHARACTERISTICS

$T_C=25^\circ C$  unless otherwise specified

Symbol	Parameter/Test Conditions	Values	Unit	
$R_{thJC}$	Thermal resistance, junction to case Per MOSFET	0.1	K/W	
$T_{Jmax}$	Max. Junction Temperature	175	°C	
$T_{STG}$	Storage Temperature Range	-40~125		
Torque	to heatsink	Recommended (M5)	2.5~5	Nm
	to terminal	Recommended (M5)	2.5~5	
Weight		240	g	

**MacMic Science & Technology Co., Ltd.**

Add: #18, Hua Shan Zhong Lu, New District, Changzhou City, Jiangsu Province, P. R. of China  
 Tel.: +86-519-85163708 Fax: +86-519-85162291 Post Code: 213022 Website: www.macmicst.com

## ELECTRICAL CHARACTERISTICS

 $T_C = 25^\circ\text{C}$  unless otherwise specified

Symbol	Parameter/Test Conditions		Min.	Typ.	Max.	Unit		
$V_{(BR)DSS}$	Drain Source Breakdown Voltage	$V_{GS}=0V, I_D=600\mu A$	150			V		
$R_{DS(ON)}$	Drain Source ON Resistance	$V_{GS}=10V, I_D=600A$		1.8	2.1	m $\Omega$		
$I_{DSS}$	Drain Source Leakage Current	$V_{DS}=150V, V_{GS}=0V$			2	mA		
$V_{GS(th)}$	Gate Threshold Voltage	$V_{GS}=V_{DS}, I_D=1.6mA$	3	4	5	V		
$I_{GSS}$	Gate Leakage Current	$V_{DS}=0V, V_{GS}=\pm 20V(\text{module})$	-2		2	mA		
$Q_g$	Total Gate Charge	$V_{DD}=75V, I_D=300A, V_{GS}=10V$		850		nC		
$Q_{gs}$	Gate Source Charge			210		nC		
$Q_{gd}$	Gate Drain Charge			320		nC		
$g_{fs}$	Forward Transconductance	$V_{DS}=10V, I_D=300A$		496		S		
$C_{iss}$	Input Capacitance	$V_{DS}=25V, V_{GS}=0V, f=1MHz$		60		nF		
$C_{oss}$	Output Capacitance			4.7		nF		
$C_{rss}$	Reverse Transfer Capacitance			0.95		nF		
$t_{d(on)}$	Turn on Delay Time	$V_{DD}=75V, I_D=300A, R_G=5\Omega, V_{GS}=15V$ (Inductive Load)	$T_J=25^\circ\text{C}$		230		ns	
$t_r$	Rise Time				350		ns	
$t_{d(off)}$	Turn off Delay Time				600		ns	
$t_f$	Fall Time				310		ns	
$E_{on}$	Turn on Energy					TBD		mJ
$E_{off}$	Turn off Energy					TBD		mJ

## Source-Drain BODY-DIODE CHARACTERISTICS

 $T_C = 25^\circ\text{C}$  unless otherwise specified

Symbol	Parameter/Test Conditions		Min.	Typ.	Max.	Unit
$I_{SD}$	Continuous Source Drain Current				600	A
$I_{SDM}$	Pulse Source Drain Current	Limited by $T_{Jmax}$			1200	A
$V_{SD}$	Forward Voltage	$I_S=300A, V_{GS}=0V$		1.0	1.2	V
$t_{rr}$	Reverse Recovery time	$I_F=300A, V_{GS}=0V$		150		ns
$Q_{rr}$	Reverse Recovery Charge	$di_F/dt=-650A/\mu s$		6500		nC

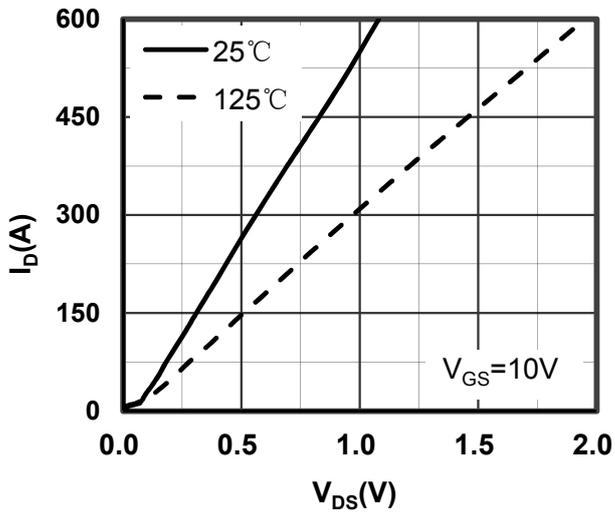


Figure 1. Typical Output Characteristics

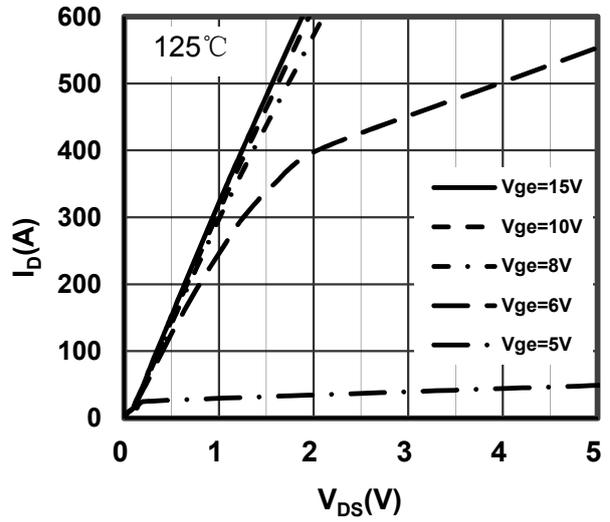


Figure 2. Typical Output Characteristics

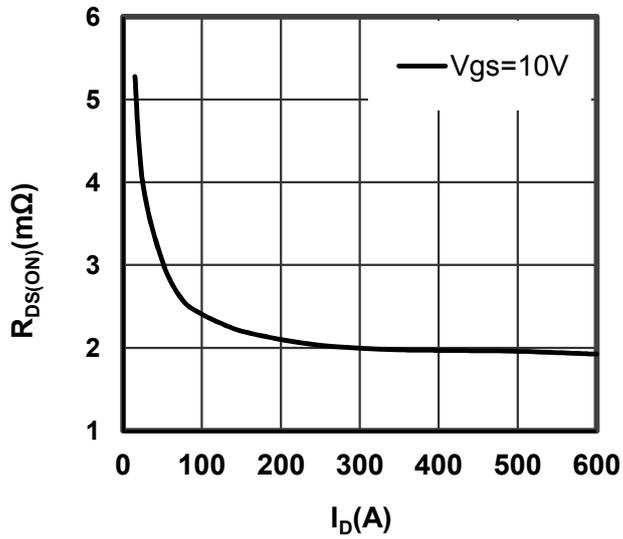


Figure 3. Drain-Source ON Resistance vs  $I_D$

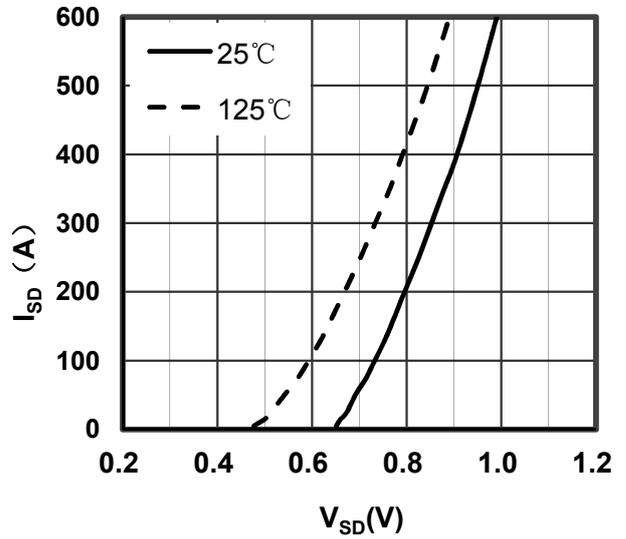


Figure 4. Source-Drain Voltage

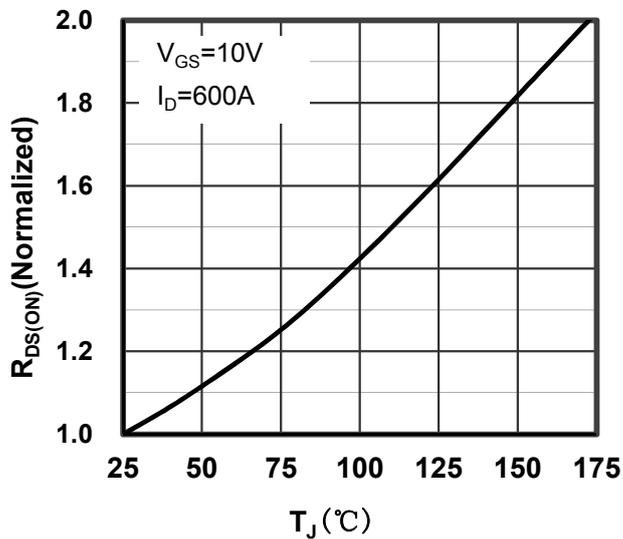


Figure 5. Drain-Source ON Resistance vs Junction Temperature

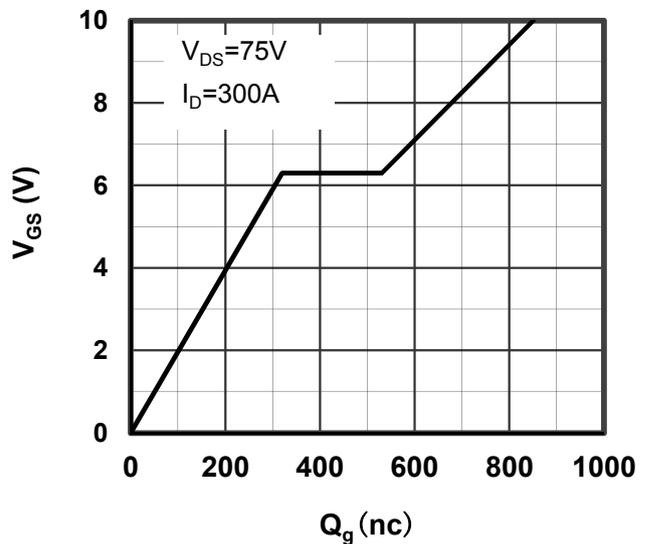


Figure 6. Gate Charge characteristics <sub>3</sub>

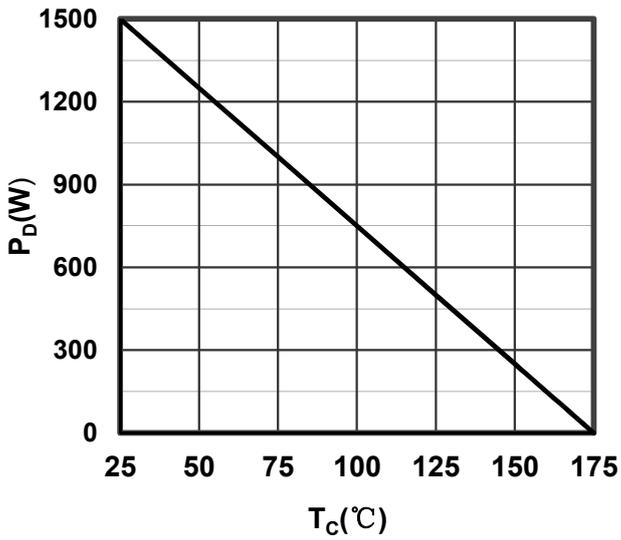


Figure 7. Maximum Power Dissipation vs Case Temperature

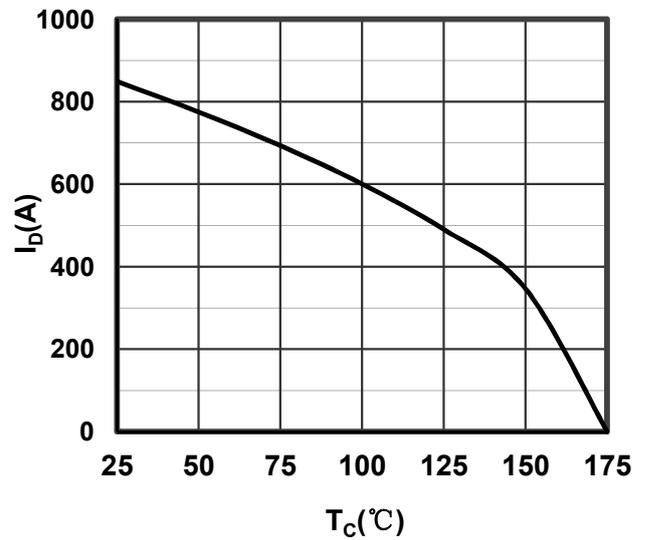


Figure 8. Maximum Continuous Drain Current vs Case Temperature

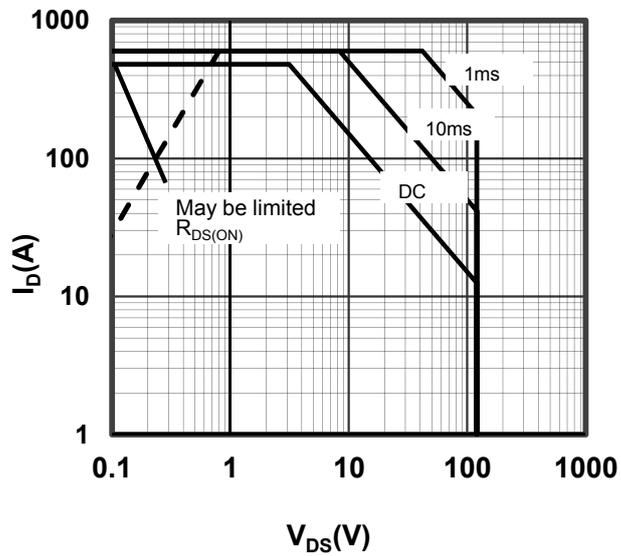


Figure 9. Maximum Forward Safe Operation Area

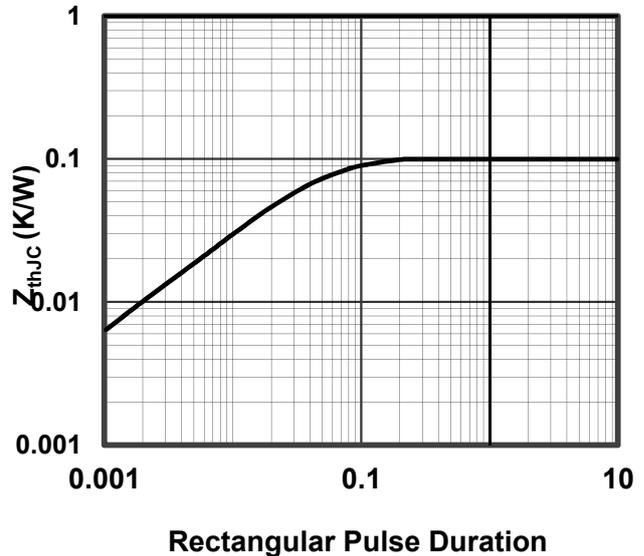


Figure 10. Transient Thermal Impedance


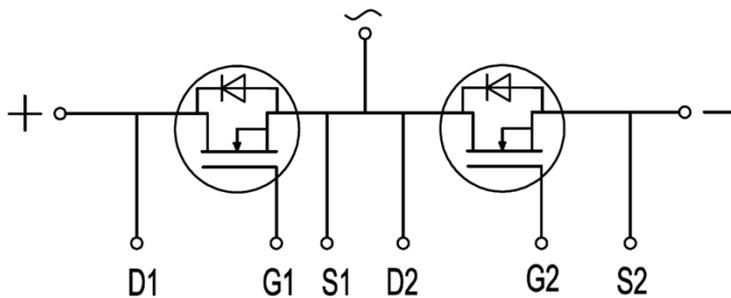


Figure 11. Circuit Diagram

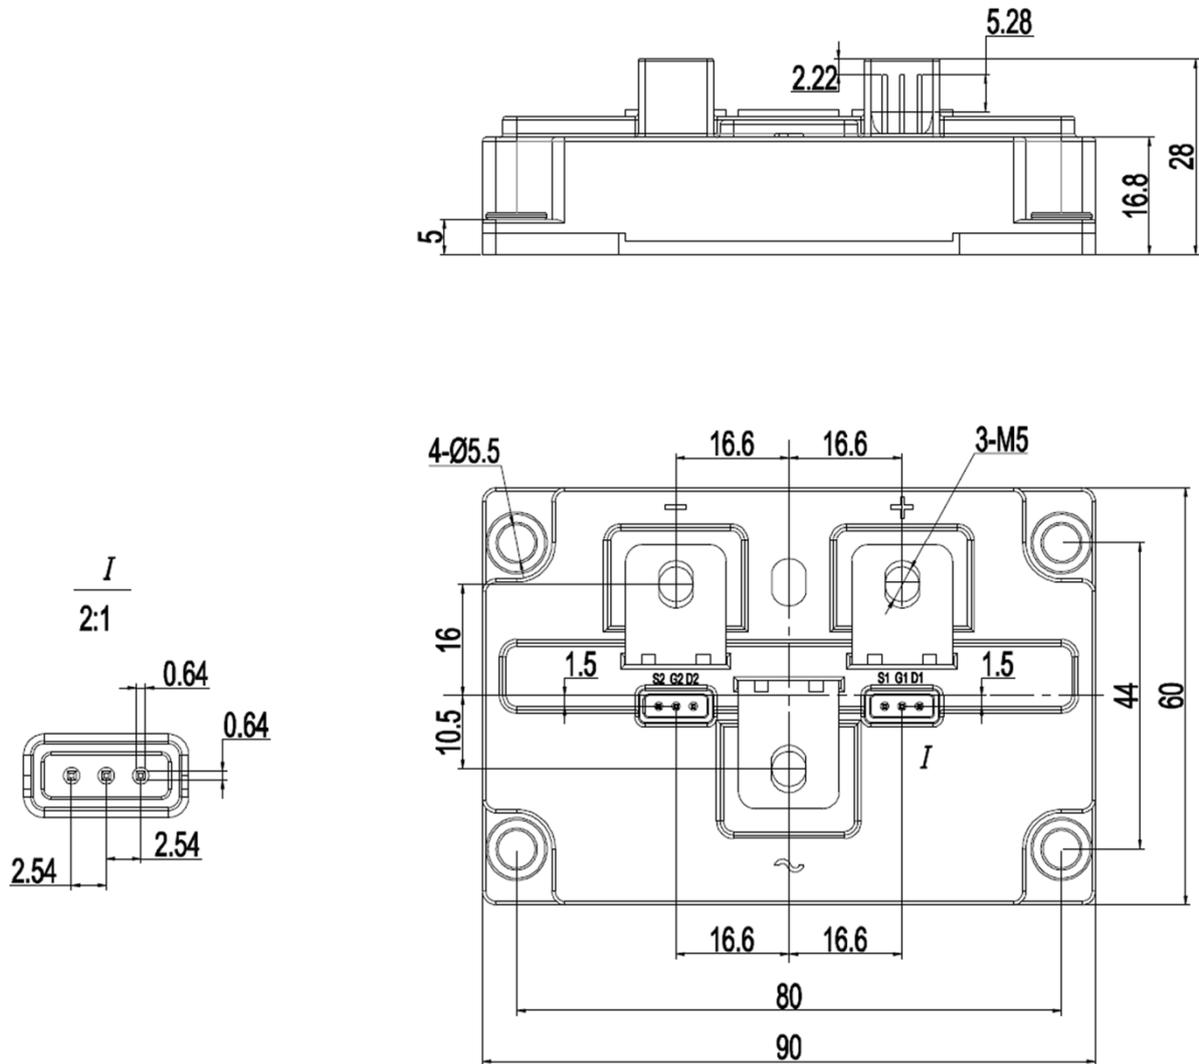

Dimensions in (mm)  
Figure 12. Package Outline