



AM3705/AM3705C 8-Channel MOS Analog Multiplexer

General Description

The AM3705/AM3705C is an eight-channel MOS analog multiplex switch. TTL compatible logic inputs that require no level shifting or input pull-up resistors and operation over a wide range of supply voltage is obtained by constructing the device with low threshold P-channel enhancement MOS technology. To simplify external logic requirements, a one-of-eight decoder and an output enable are included in the device.

Important design features include:

- TTL/DTL compatible input logic levels
- Operation from standard +5V and -15V supplies
- Wide analog voltage range - $\pm 5V$
- One-of-eight decoder on chip
- Output enable control

■ Low ON resistance - 150Ω


■ Input gate protection

■ Low leakage currents - 0.5 nA


The AM3705/AM3705C is designed as a low cost analog multiplex switch to fulfill a wide variety of data acquisition and data distribution applications including cross-point switching, MUX front ends for A/D converters, process controllers, automatic test gear, programmable power supplies and other military or industrial instrumentation applications.

The AM3705 is specified for operation over the -55°C to $+125^{\circ}\text{C}$ military temperature range. The AM3705C is specified for operation over the -25°C to $+85^{\circ}\text{C}$ temperature range.

Block and Connection Diagrams (MIL-STD-806B)

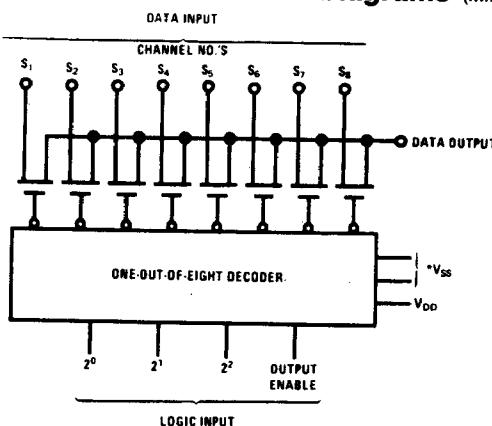

Dual-In-Line Package

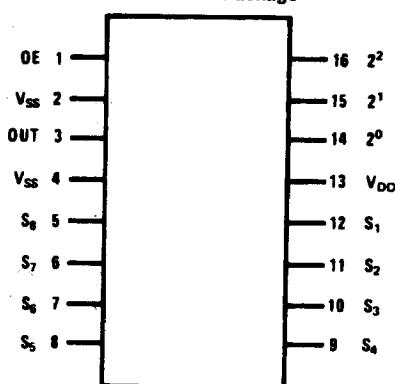

TOP VIEW

*Both V_{SS} lines are internally connected; either one or both may be used.

TL/H/5660-2

Order Number AM3705D or AM3705CD

See NS Package D16A

Order Number AM3705F or AM3705CF

See NS Package F16A

TL/H/5660-6

Truth Table

LOGIC INPUTS			CHANNEL	
2 ⁰	2 ¹	2 ²	OE	ON
L	L	L	H	S ₁
H	L	L	H	S ₂
L	H	L	H	S ₃
H	H	L	H	S ₄
L	L	H	H	S ₅
H	L	H	H	S ₆
L	H	H	H	S ₇
H	H	H	H	S ₈
X	X	X	L	OFF

Absolute Maximum Ratings

Positive Voltage on Any Pin (Note 1)	+0.3V	Operating Temperature Range AM3705	-55°C to +125°C
Negative Voltage on Any Pin (Note 1)	-35V	AM3705C	-25°C to +85°C
Source to Drain Current	$\pm 30\text{mA}$	Storage Temperature Range	-65°C to +150°C
Logic Input Current	$\pm 0.1\text{ mA}$	Lead Temperature (Soldering, 10 sec)	300°C
Power Dissipation (Note 2)	500 mW		

Electrical Characteristics (Note 3)

Parameter	Symbol	Conditions	Limits			Units
			Min	Typ	Max	
ON Resistance	R_{ON}	$V_{IN} = V_{SS}; I_{OUT} = 100\mu\text{A}$		80	250	Ω
ON Resistance	R_{ON}	$V_{IN} = -5\text{V}; I_{OUT} = -100\mu\text{A}$		160	400	Ω
ON Resistance AM3705 AM3705C	R_{ON}	$V_{IN} = -5\text{V}; I_{OUT} = -100\mu\text{A}$ $T_A = +125^\circ\text{C}$ $T_A = +70^\circ\text{C}$			400	Ω
ON Resistance	R_{ON}	$V_{IN} = +5\text{V}; C_{DD} = -15\text{V};$ $I_{OUT} = 100\mu\text{A}$		100		Ω
ON Resistance	R_{ON}	$V_{IN} = 0\text{V}, V_{DD} = -55\text{V},$ $I_{OUT} = -100\mu\text{A}$		150		Ω
ON Resistance	R_{ON}	$V_{IN} = -5\text{V}; V_{DD} = -15\text{V}$ $I_{OUT} = -100\mu\text{A}$		250		Ω
OFF Resistance	R_{OFF}			10 ¹⁰		Ω
Output Leakage Current AM3705 AM3705C	I_{LO}	$V_{SS} - V_{OUT} = 15\text{V}$ $V_{SS} - V_{OUT} = 15\text{V}; T_A = 125^\circ\text{C}$ $V_{SS} - V_{OUT} = 15\text{V}; T_A = 70^\circ\text{C}$		0.5	10	nA
Data Input Leakage Current AM3705 AM3705	I_{LDI}	$V_{SS} - V_{IN} = 15\text{V}$ $V_{SS} - V_{IN} = 15\text{V}; T_A = 125^\circ\text{C}$ $V_{SS} - V_{IN} = 15\text{V}; T_A = 70^\circ\text{C}$		0.1	3.0	nA
Logic Input Leakage Current AM3705 AM3705C	I_{LI}	$V_{SS} - V_{Logic\ In} = 15\text{V}$ $V_{SS} - V_{Logic\ In} = 15\text{V}; T_A = 125^\circ\text{C}$ $V_{SS} - V_{Logic\ In} = 15\text{V}; T_A = 70^\circ\text{C}$.001	1	μA
Logic Input LOW Level	V_{IL}	$V_{SS} = +5.0\text{V}$		0.5	1.0	V
Logic Input LOW Level	V_{IL}		V_{DD}		$V_{SS} - 4.0$	V
Logic Input HIGH Level	V_{IH}	$V_{SS} = +5.0\text{V}$	3.0	3.5		V
Logic Input HIGH Level	V_{IH}		$V_{SS} - 2.0$		$V_{SS} + 0.3$	V
Channel Switching Time-Positive Channel Switching Time-Negative	t^+ t^-	Switching Time Test Circuit		300 600		ns ns
Channel Separation		$f = 1\text{ kHz}$		62		dB
Output Capacitance	C_{db}	$V_{SS} - V_{OUT} = 0; f = 1\text{ MHz}$		35		pF
Data Input Capacitance	C_{sb}	$V_{SS} - V_{DIP} = 0; f = 1\text{ MHz}$		6.0		pF
Logic Input Capacitance	C_{cg}	$V_{SS} - V_{Logic\ In} = 0; f = 1\text{ MHz}$		6.0		pF
Power Dissipation	P_D	$V_{DD} = -31\text{V}, V_{SS} = 0\text{V}$		125	175	mW


Note 1: All voltages referenced to V_{SS} .

Note 2: Ratings applies for ambient temperatures to $+25^\circ\text{C}$, derate linearly at $3\text{ mW}/^\circ\text{C}$ for ambient temperatures above $+25^\circ\text{C}$.


Note 3: Specifications apply for $T_A = 25^\circ\text{C}$, $-24\text{V} \leq V_{DD} \leq -20\text{V}$, and $+5.0\text{V} \leq V_{SS} \leq +7.0\text{V}$; unless otherwise specified (all voltages are referenced to ground.)

Typical Performance Characteristics


ON Resistance vs Analog Input Voltage

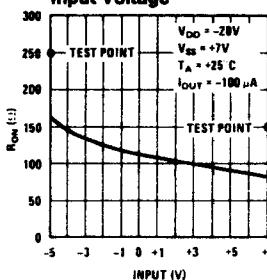


ON Resistance vs Ambient Temperature

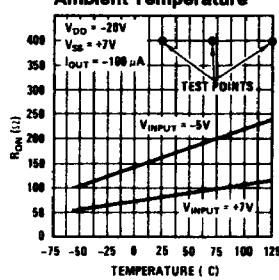



ON Resistance vs V_{DD} Supply Voltage



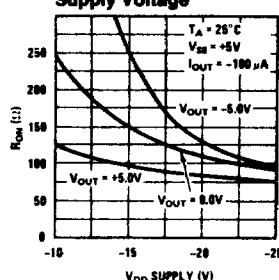



Output Leakage Current vs Ambient Temperature

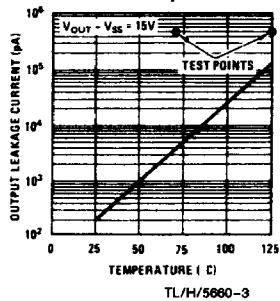

Switching Time Test Circuit

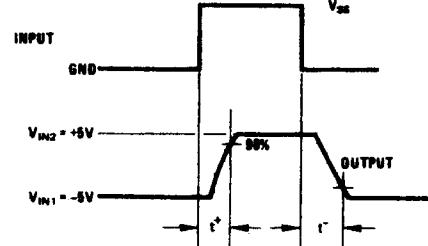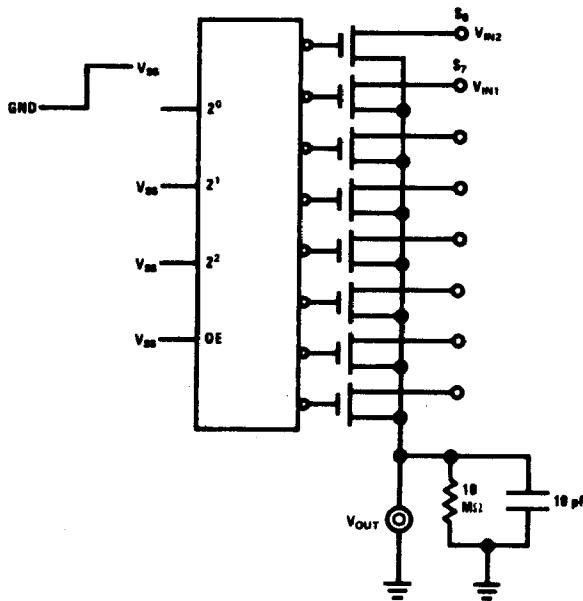


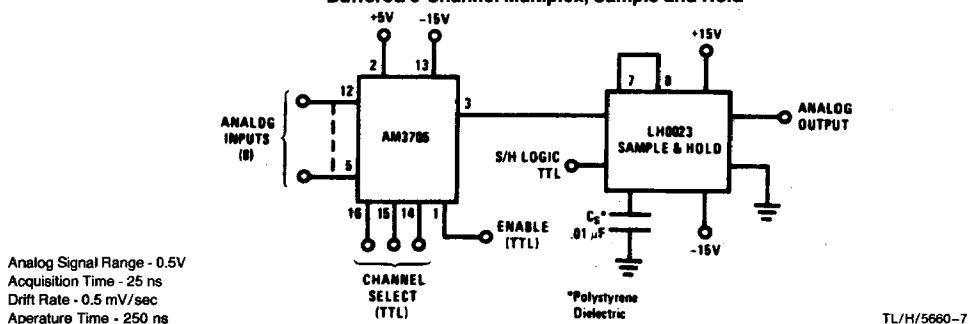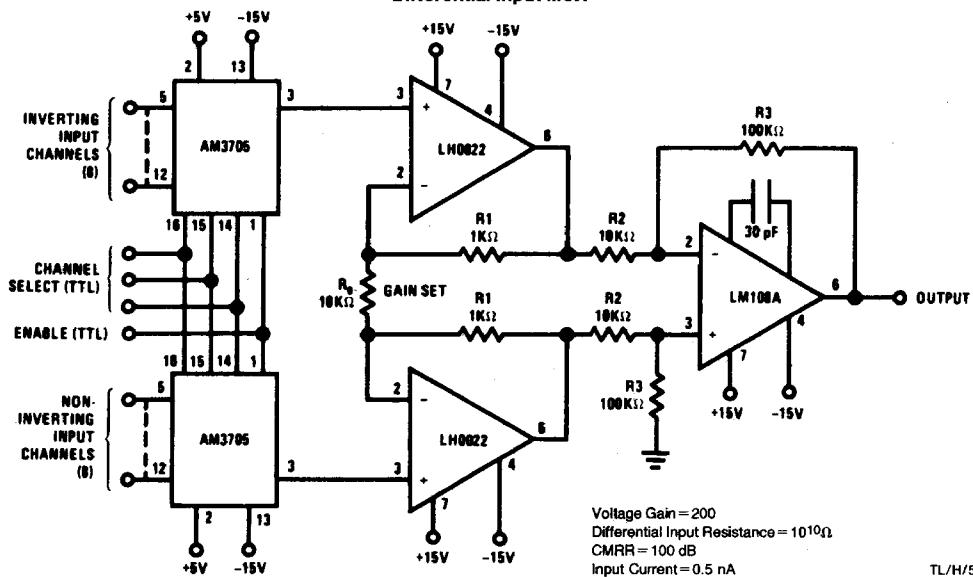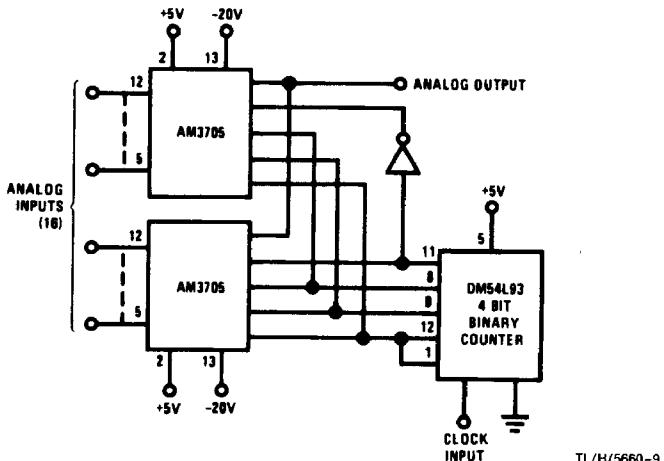Typical Application**Buffered 8-Channel Multiplex, Sample and Hold****Differential Input MUX****16-Channel Commutator**

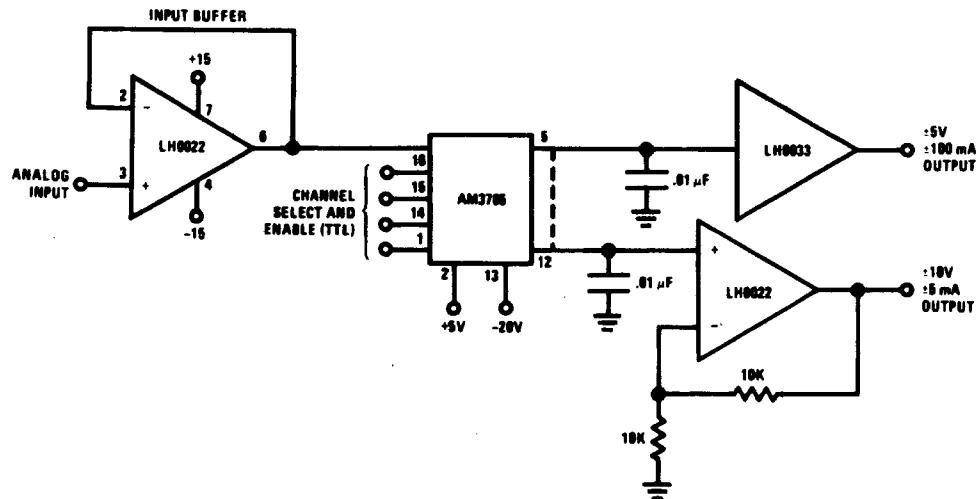Typical Application (Continued)**8-Channel Demultiplexer with Sample and Hold**

Drift Rate-20 mV/sec

TL/H/5660-10

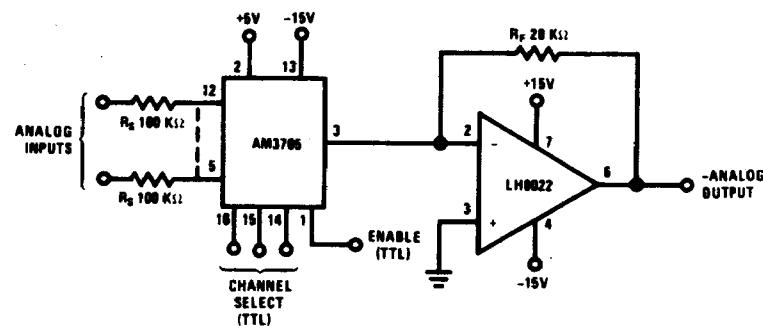Wide Input Range Analog Switch

Analog Input Range-25V

TL/H/5660-11

Slew Rate - 5 V/μs

T1115/H/T1

Schematic Diagram

