

Am25LS240•Am54LS/74LS240

Octal Three-State Inverting Drivers

DISTINCTIVE CHARACTERISTICS

- Three-state outputs drive bus lines directly
- Hysteresis at inputs improve noise margin
- PNP inputs reduce D.C. loading on bus lines
- Data-to-output propagation delay times – 18ns MAX.
- Enable-to-output – 30ns MAX.
- Am25LS240 specified at 48mA output current
- 20 pin hermetic and molded DIP packages
- 100% product assurance testing to MIL-STD-883 requirements


FUNCTIONAL DESCRIPTION

The 'LS240 is an octal inverting line driver fabricated using advanced low-power Schottky technology. The 20-pin package provides improved printed circuit board density for use in memory address and clock driver applications.

Three-state outputs are provided to drive bus lines directly. The Am25LS240 is specified at 48mA and 24mA output sink current, while the Am54/74LS240 is guaranteed at 12mA over the military range and 24mA over the commercial range. Four buffers are enabled from one common line and the other four from a second enable line.

Improved noise rejection and high fan-out are provided by input hysteresis and low current PNP inputs.

LOGIC DIAGRAM

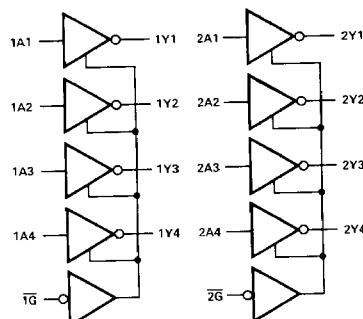


INPUTS		OUTPUT
\bar{G}	A	Y
H	X	Z
L	H	L
L	L	H


Note: All devices have input hysteresis.

LIC-331

CONNECTION DIAGRAM Top View



LOGIC SYMBOL

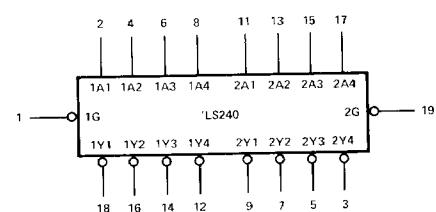

VCC = Pin 20

GND = Pin 10

LIC-332

Note: Pin 1 is marked for orientation.

Am25LS240**ELECTRICAL CHARACTERISTICS**

The Following Conditions Apply Unless Otherwise Specified:

COM'L TA = 0°C to +70°C V_{CC} = 5.0V ± 5% (MIN. = 4.75V MAX. = 5.25V)MIL TA = -55°C to +125°C V_{CC} = 5.0V ± 10% (MIN. = 4.50V MAX. = 5.50V)**DC CHARACTERISTICS OVER OPERATING RANGE**

Parameters	Description		Test Conditions (Note 1)		Min.	Typ. (Note 2)	Max.	Units
V _{OH}	High-Level Output Voltage		V _{CC} = MIN., V _{IH} = 2.0V I _{OH} = -3.0mA, V _{IL} = V _{IL} MAX.		2.4	3.4		Volts
			V _{CC} = MIN., V _{IL} = 0.5V		MIL, I _{OH} = -12mA	2.0		
			COM'L, I _{OH} = -15mA		COM'L, I _{OL} = 48mA	2.0		
V _{OL}	Low-Level Output Voltage		All I _{OL} = 12mA			0.25	0.4	Volts
			All I _{OL} = 24mA			0.35	0.5	
			COM'L I _{OL} = 48mA				0.55	
V _{IH}	High-Level Input Voltage		Guaranteed input logical HIGH voltage for all inputs		2.0			Volts
V _{IL}	Low-Level Input Voltage	COM'L					0.8	Volts
		MIL					0.7	
V _{IK}	Input Clamp Voltage		V _{CC} = MIN., I _i = -18mA				-1.5	Volts
Hysteresis (V _{T+} - V _{T-})			V _{CC} = MIN.		0.2	0.4		Volts
I _{OZH}	Off-State Output Current, High Level Voltage Applied		V _{CC} = MAX. V _{IH} = 2.0V	V _O = 2.7V			20	μA
	Off-State Output Current, Low-Level Voltage Applied		V _{IL} = V _{IL} MAX.	V _O = 0.4V			-20	
I _I	Input Current at Maximum Input Voltage		V _{CC} = MAX., V _I = 7.0V				0.1	mA
I _{IH}	High-Level Input Current, Any Input		V _{CC} MAX., V _{IH} = 2.7V				20	μA
I _{IL}	Low-Level Input Current		V _{CC} = MAX., V _{IL} = 0.4V				-200	μA
I _{SC}	Short Circuit Output Current (Note 3)		V _{CC} = MAX.		-40		-225	mA
I _{CC}	Supply Current	V _{CC} = MAX. Outputs open	All Outputs HIGH			13	23	mA
			All Outputs LOW			26	44	
			Outputs at Hi-Z			29	50	

Notes: 1. For conditions shown as MIN. or MAX., use the appropriate value specified under recommended operating conditions.

2. All typical values are V_{CC} = 5.0V, T_A = 25°C.

3. Not more than one output should be shorted at a time, and duration of the short-circuit should not exceed one second.

2

MAXIMUM RATINGS above which the useful life may be impaired

Torage Temperature	-65°C to +150°C
Temperature (Ambient) Under Bias	-55°C to +125°C
upply Voltage to Ground Potential	-0.5V to +7.0V
I _C Voltage Applied to Outputs for HIGH Output State	-0.5V to +V _{CC} max.
I _C Input Voltage	-0.5V to +7.0V
I _C Output Current	150mA
I _C Input Current	-30mA to +5.0mA

Am54LS/74LS240

ELECTRICAL CHARACTERISTICS

The Following Conditions Apply Unless Otherwise Specified:

COM'L $T_A = 0^\circ\text{C}$ to $+70^\circ\text{C}$ $V_{CC} = 5.0V \pm 5\%$ (MIN. = 4.75V MAX. = 5.25V)MIL $T_A = -55^\circ\text{C}$ to $+125^\circ\text{C}$ $V_{CC} = 5.0V \pm 10\%$ (MIN. = 4.50V MAX. = 5.50V)

DC CHARACTERISTICS OVER OPERATING RANGE


Parameters	Description		Test Conditions (Note 1)	Min.	Typ. (Note 2)	Max.	Units
V_{OH}	High-Level Output Voltage		$V_{CC} = \text{MIN.}, V_{IH} = 2.0V$ $I_{OH} = -3.0mA, V_{IL} = V_{IL}\text{MAX.}$	2.4	3.4		Volts
			$V_{CC} = \text{MIN.},$ $V_{IL} = 0.5V$ $\text{MIL}, I_{OH} = -12mA$	2.0			
			$\text{COM'L}, I_{OH} = -15mA$	2.0			
V_{OL}	Low-Level Output Voltage		$V_{CC} = \text{MIN.}$ $\text{All}, I_{OL} = 12mA$ $\text{COM'L}, I_{OL} = 24mA$		0.25 0.35	0.4 0.5	Volts
V_{IH}	High-Level Input Voltage		Guaranteed input logical HIGH voltage for all inputs	2.0			Volts
V_{IL}	Low-Level Input Voltage		$V_{CC} = \text{MIN.}$ COM'L			0.8	Volts
			MIL			0.7	
V_{IK}	Input Clamp Voltage		$V_{CC} = \text{MIN.}, I_I = -18mA$			-1.5	Volts
	Hysteresis ($V_{T+} - V_{T-}$)		$V_{CC} = \text{MIN.}$	0.2	0.4		Volts
I_{OZH}	Off-State Output Current, High Level Voltage Applied		$V_{CC} = \text{MAX.}$ $V_{IH} = 2.0V$ $V_O = 2.7V$			20	μA
I_{OZL}	Off-State Output Current, Low-Level Voltage Applied		$V_{IL} = V_{IL}\text{MAX.}$ $V_O = 0.4V$			-20	
I_I	Input Current at Maximum Input Voltage		$V_{CC} = \text{MAX.}, V_I = 7.0V$			0.1	
I_{IH}	High-Level Input Current, Any Input		$V_{CC} = \text{MAX.}, V_{IH} = 2.7V$			20	μA
I_{IL}	Low-Level Input Current		$V_{CC} = \text{MAX.}, V_{IL} = 0.4V$			-200	μA
I_{SC}	Short Circuit Output Current (Note 3)		$V_{CC} = \text{MAX.}$	-40		-225	mA
I_{CC}	Supply Current	$V_{CC} = \text{MAX.}$ Outputs open	All Outputs HIGH		13	23	mA
			All Outputs LOW		26	44	
			Outputs at Hi-Z		29	50	

Notes: 1. For conditions shown as MIN. or MAX., use the appropriate value specified under recommended operating conditions.

2. All typical values are $V_{CC} = 5.0V$, $T_A = 25^\circ\text{C}$.

3. Not more than one output should be shorted at a time, and duration of the short-circuit should not exceed one second.

Metallization and Pad Layout

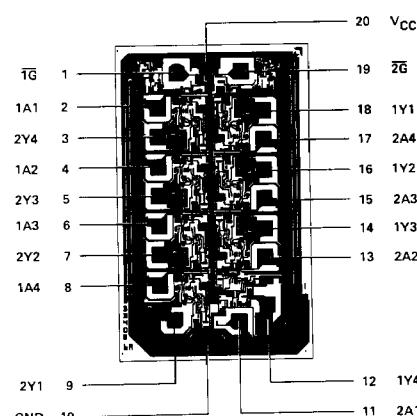

DIE SIZE .056" X .089"

SWITCHING CHARACTERISTICS(T_A = +25°C, V_{CC} = 5.0V)



Parameters	Description	Am25LS240			Am54LS/74LS240			Test Conditions (Notes 1-5)
		Min.	Typ.	Max.	Min.	Typ.	Max.	
t _{PLH}	Propagation Delay Time, Low-to-High-Level Output		8.0	12		9.0	14	ns
t _{PHL}	Propagation Delay Time, High-to-Low-Level Output		12	16		12	18	ns
t _{PZL}	Output Enable Time to Low Level		19	27		20	30	ns
t _{PZH}	Output Enable Time to High Level		14	20		15	23	ns
t _{PLZ}	Output Disable Time from Low Level		14	23		15	25	ns
t _{PHZ}	Output Disable Time from High Level		10	18		10	18	ns
								C _L = 45pF R _L = 667Ω
								C _L = 5.0pF R _L = 667Ω

2

Am25LS ONLY
SWITCHING CHARACTERISTICS
OVER OPERATING RANGE*

Parameters	Description	Am25LS COM'L		Am25LS MIL		Units	Test Conditions
		TA = 0°C to +70°C	V _{CC} = 5.0V ±5%	TA = -55°C to +125°C	V _{CC} = 5.0V ±10%		
t _{PLH}	Propagation Delay Time, Low-to-High-Level Output		16		19	ns	C _L = 45pF R _L = 667Ω
t _{PHL}	Propagation Delay Time, High-to-Low-Level Output		22		25	ns	
t _{PZL}	Output Enable Time to Low Level		37		42	ns	
t _{PZH}	Output Enable Time to High Level		27		31	ns	
t _{PLZ}	Output Disable Time from Low Level		31		36	ns	
t _{PHZ}	Output Disable Time from High Level		25		28	ns	

*AC performance over the operating temperature range is guaranteed by testing defined in Group A, Subgroup 9.

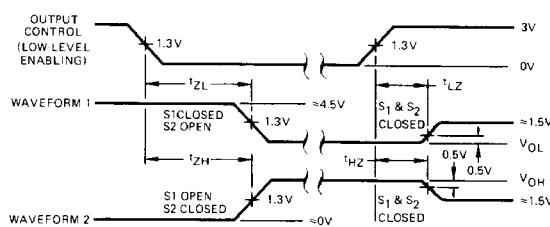LOAD CIRCUIT FOR
THREE-STATE OUTPUTSVOLTAGE WAVEFORMS
ENABLE AND DISABLE TIMES, THREE-STATE OUTPUTS

LIC-334

LIC-335

- Notes: 1. Waveform 1 is for an output with internal conditions such that the output is low except when disabled by the output control.
 2. Waveform 2 is for an output with internal conditions such that the output is high except when disabled by the output control.
 3. In the examples above, the phase relationships between inputs and outputs have been chosen arbitrarily. PRR ≤ 1.0MHz, Z_{OUT} ≈ 50Ω and t_r ≤ 2.5ns, t_f ≤ 2.5ns.