
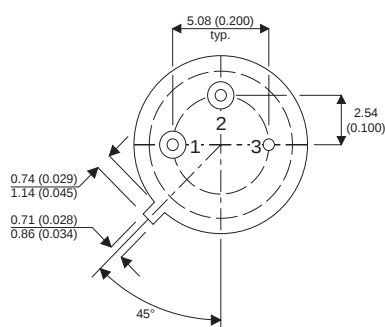


MECHANICAL DATA

Dimensions in mm (inches)

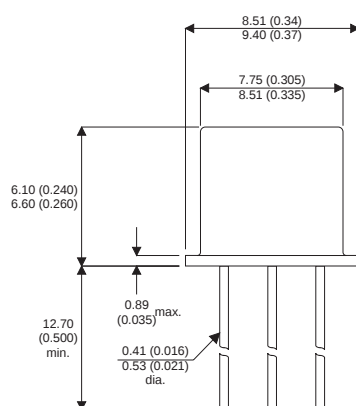

TO39 PACKAGE

Underside View

Pin 1 = Emitter Pin 2 = Base Pin 3 = Collector

NPN SILICON TRANSISTOR

FEATURES

- NPN High Voltage Planar Transistor
- Hermetic TO39 Package
- Full Screening Options Available

ABSOLUTE MAXIMUM RATINGS ($T_{case} = 25^{\circ}C$ unless otherwise stated)

V_{CBO}	Collector – Base Voltage	150V
V_{CEO}	Collector – Emitter Voltage ($I_B = 0$)	150V
V_{EBO}	Emitter – Base Voltage ($I_B = 0$)	6V
I_C	Collector Current	300mA
P_D	Total Device Dissipation $T_A = 25^{\circ}C$	1W
P_D	Derate above $25^{\circ}C$	5.71mW / $^{\circ}C$
T_{stg}	Storage Temperature	-65 to $200^{\circ}C$
R_{ja}	Thermal Resistance Junction to Ambient	175 $^{\circ}C/W$

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise stated)

Parameter		Test Conditions		Min.	Typ.	Max.	Unit
OFF CHARACTERISTICS							
V _{(BR)CEO}	Collector-Emitter Breakdown Voltage ¹	I _C = 10mA	I _B = 0	150			V
V _{(BR)CBO}	Collector-Base Breakdown Voltage	I _C = 10μA	I _E = 0	150			
V _{(BR)EBO}	Emitter-Base Breakdown Voltage	I _E = 10μA	I _C = 0	6			
I _{CBO}	Collector Cutoff Current	V _{CB} = 75V	I _E = 0			0.05	μA
		V _{CB} = 75V	I _E = 0			50	
		T _A = 150°C					
I _{EBO}	Emitter Cutoff Current	V _{EB(off)} = 4V	I _C = 0			25	nA
ON CHARACTERISTICS							
h _{FE}	DC Current Gain	I _C = 0.1mA	V _{CE} = 10V	35			—
		I _C = 1mA	V _{CE} = 10V	50			
		I _C = 10mA	V _{CE} = 10V ¹	75			
		I _C = 150mA	V _{CE} = 10V ¹	100		300	
		I _C = 300mA	V _{CE} = 10V ¹	20			
V _{CE(SAT)}	Collector-Emitter Saturation Voltage ¹	I _C = 10mA	I _B = 1mA			0.2	V
		I _C = 50mA	I _B = 5mA			0.25	
		I _C = 150mA	I _B = 15mA			0.4	
V _{BE(SAT)}	Base-Emitter Saturation Voltage ¹	I _C = 10mA	I _B = 1mA			0.8	V
		I _C = 50mA	I _B = 5mA			0.9	
		I _C = 150mA	I _B = 15mA			1.2	
SMALL SIGNAL CHARACTERISTICS							
f _T	Current-Gain–Bandwidth Product ²	V _{CE} = 20V	I _C = 20mA f = 100MHz	150			MHz
C _{obo}	Output Capacitance	V _{CB} = 10V	I _E = 0 f = 1MHz			8	pF
C _{ibo}	Input Capacitance	V _{EB} = 0.5V	I _C = 0 f = 1MHz			80	
h _{ie}	Input Impedance	V _{CE} = 10V	I _C = 10mA f = 1KHz	0.25		1.25	Ω
h _{re}	Voltage Feedback Ratio	V _{CE} = 10V	I _C = 10mA f = 1KHz			4	x10 ⁻⁴
h _{fe}	Small-Signal Current Gain	V _{CE} = 10V	I _C = 10mA f = 1KHz			375	—
h _{oe}	Output Admittance	V _{CE} = 10V	I _C = 10mA f = 1KHz			200	Ω

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

ELECTRICAL CHARACTERISTICS Continued ($T_A = 25^\circ\text{C}$ unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
SWITCHING CHARACTERISTICS					
t_d Delay Time	$I_C = 150\text{mA}$ $I_{B1} = 15\text{mA}$ $V_{CC} = 100\text{V}$ $V_{EB(\text{off})} = -2\text{V}$		20		ns
t_r Rise Time	$I_C = 150\text{mA}$ $I_{B1} = 15\text{mA}$ $V_{CC} = 100\text{V}$ $V_{EB(\text{off})} = -2\text{V}$		35		ns
t_s Storage Time	$I_C = 150\text{mA}$ $V_{CC} = 100\text{V}$ $I_{B1} = I_{B2} = 15\text{mA}$		800		ns
t_f Fall Time	$I_C = 150\text{mA}$ $V_{CC} = 100\text{V}$ $I_{B1} = I_{B2} = 15\text{mA}$		80		ns

- 1) Pulse test : Pulse Width < 300 μs ,Duty Cycle < 2%
- 2) f_t is defined as the frequency at which $|h_{fe}|.f_{\text{test}}$