




- ▼ Simple Drive Requirement
- ▼ Low On-resistance
- ▼ Fast Switching Characteristic

www.DataSheet4U.com

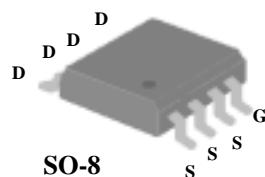


$BV_{DSS}$	-30V
$R_{DS(ON)}$	14mΩ
$I_D$	-10.7A

## Description

The Advanced Power MOSFETs from APEC provide the designer with the best combination of fast switching, ruggedized device design, low on-resistance and cost-effectiveness.

The SO-8 package is universally preferred for all commercial-industrial surface mount applications and suited for low voltage applications such as DC/DC converters.

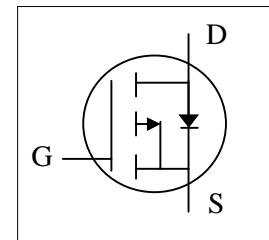

## Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
$V_{DS}$	Drain-Source Voltage	-30	V
$V_{GS}$	Gate-Source Voltage	$\pm 25$	V
$I_D @ T_A = 25^\circ C$	Continuous Drain Current <sup>3</sup>	-10.7	A
$I_D @ T_A = 70^\circ C$	Continuous Drain Current <sup>3</sup>	-8.6	A
$I_{DM}$	Pulsed Drain Current <sup>1</sup>	-50	A
$P_D @ T_A = 25^\circ C$	Total Power Dissipation	2.5	W
	Linear Derating Factor	0.02	W/°C
$T_{STG}$	Storage Temperature Range	-55 to 150	°C
$T_J$	Operating Junction Temperature Range	-55 to 150	°C

## Thermal Data

Symbol	Parameter	Value	Unit
$R_{thj-a}$	Thermal Resistance Junction-ambient <sup>3</sup>	Max. 50	°C/W



## Electrical Characteristics @ $T_j=25^\circ\text{C}$ (unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$\text{BV}_{\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}$ , $I_{\text{D}}=-250\mu\text{A}$	-30	-	-	V
$\Delta \text{BV}_{\text{DSS}}/\Delta T_j$	Breakdown Voltage Temperature Coefficient	Reference to $25^\circ\text{C}$ , $I_{\text{D}}=-1\text{mA}$	-	-0.015	-	$\text{V}/^\circ\text{C}$
$R_{\text{DS(ON)}}$	Static Drain-Source On-Resistance <sup>2</sup>	$V_{\text{GS}}=-10\text{V}$ , $I_{\text{D}}=-10\text{A}$	-	-	14	$\text{m}\Omega$
		$V_{\text{GS}}=-4.5\text{V}$ , $I_{\text{D}}=-5\text{A}$	-	-	20	$\text{m}\Omega$
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{\text{DS}}=V_{\text{GS}}$ , $I_{\text{D}}=-250\mu\text{A}$	-1	-	-3	V
$g_{\text{fs}}$	Forward Transconductance	$V_{\text{DS}}=-10\text{V}$ , $I_{\text{D}}=-10\text{A}$	-	13	-	S
$I_{\text{DSS}}$	Drain-Source Leakage Current ( $T_j=25^\circ\text{C}$ )	$V_{\text{DS}}=-30\text{V}$ , $V_{\text{GS}}=0\text{V}$	-	-	-1	$\mu\text{A}$
	Drain-Source Leakage Current ( $T_j=70^\circ\text{C}$ )	$V_{\text{DS}}=-24\text{V}$ , $V_{\text{GS}}=0\text{V}$	-	-	-25	$\mu\text{A}$
$I_{\text{GSS}}$	Gate-Source Leakage	$V_{\text{GS}}= \pm 25\text{V}$	-	-	$\pm 100$	nA
$Q_g$	Total Gate Charge <sup>2</sup>	$I_{\text{D}}=-10.7\text{A}$	-	29	46	nC
$Q_{\text{gs}}$	Gate-Source Charge		-	6	-	nC
$Q_{\text{gd}}$	Gate-Drain ("Miller") Charge		-	14	-	nC
$t_{\text{d(on)}}$	Turn-on Delay Time <sup>2</sup>	$V_{\text{DS}}=-15\text{V}$	-	15	-	ns
$t_r$	Rise Time	$I_{\text{D}}=-1\text{A}$	-	12	-	ns
$t_{\text{d(off)}}$	Turn-off Delay Time	$R_G=3.3\Omega$ , $V_{\text{GS}}=-10\text{V}$	-	100	-	ns
$t_f$	Fall Time	$R_D=15\Omega$	-	70	-	ns
$C_{\text{iss}}$	Input Capacitance	$V_{\text{GS}}=0\text{V}$	-	2600	4100	pF
$C_{\text{oss}}$	Output Capacitance	$V_{\text{DS}}=-25\text{V}$	-	500	-	pF
$C_{\text{rss}}$	Reverse Transfer Capacitance	f=1.0MHz	-	370	-	pF

## Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$V_{\text{SD}}$	Forward On Voltage <sup>2</sup>	$I_{\text{S}}=-10.7\text{A}$ , $V_{\text{GS}}=0\text{V}$	-	-	-1.2	V
$t_{\text{rr}}$	Reverse Recovery Time	$I_{\text{S}}=-10.7\text{A}$ , $V_{\text{GS}}=0\text{V}$ ,	-	31	-	ns
$Q_{\text{rr}}$	Reverse Recovery Charge	$dI/dt=100\text{A}/\mu\text{s}$	-	25	-	nC

## Notes:

- 1.Pulse width limited by Max. junction temperature.
- 2.Pulse width  $\leq 300\mu\text{s}$ , duty cycle  $\leq 2\%$ .
- 3.Surface mounted on 1 in<sup>2</sup> copper pad of FR4 board ;  $125\text{ }^\circ\text{C}/\text{W}$  when mounted on min. copper pad.

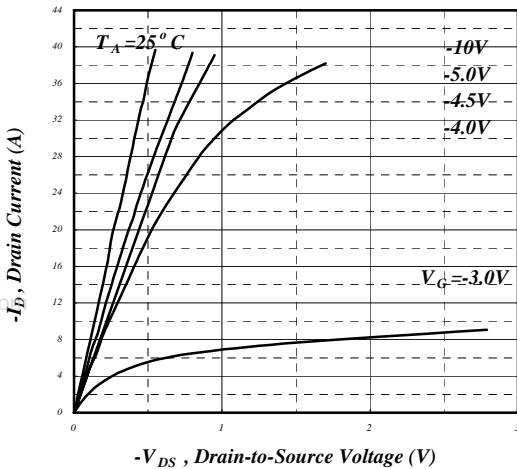


Fig 1. Typical Output Characteristics

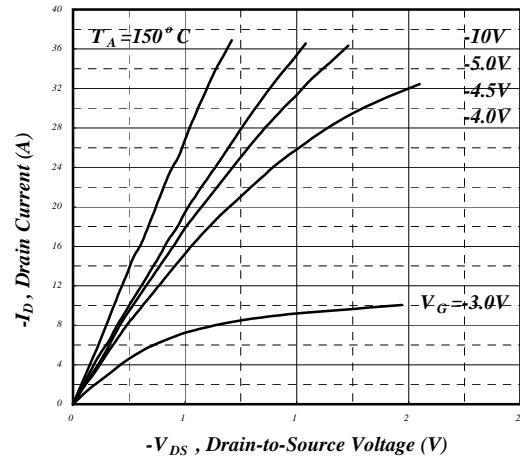


Fig 2. Typical Output Characteristics

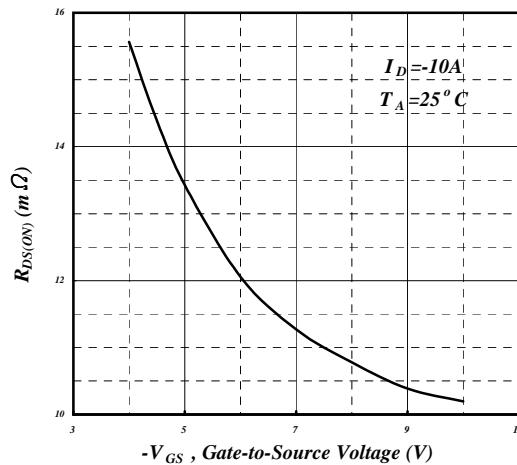


Fig 3. On-Resistance v.s. Gate Voltage

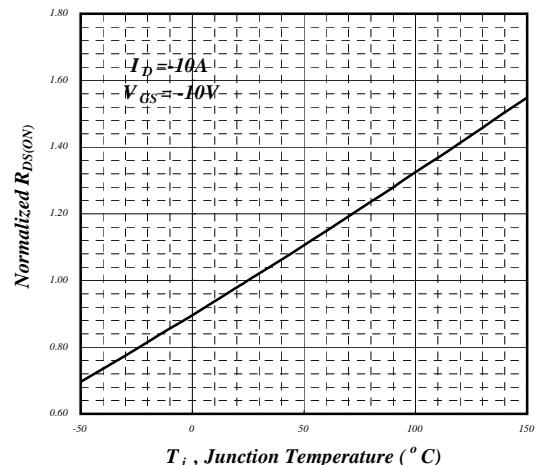


Fig 4. Normalized On-Resistance v.s. Junction Temperature

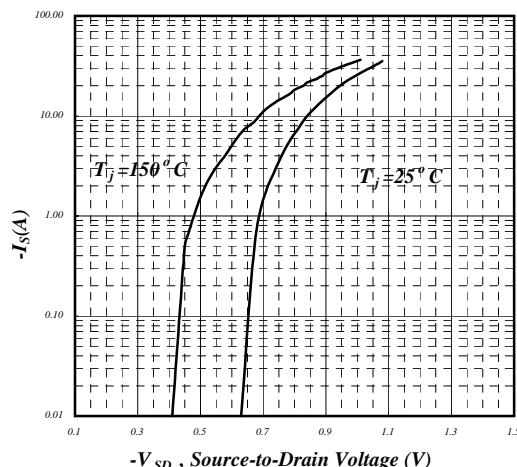


Fig 5. Forward Characteristic of Reverse Diode


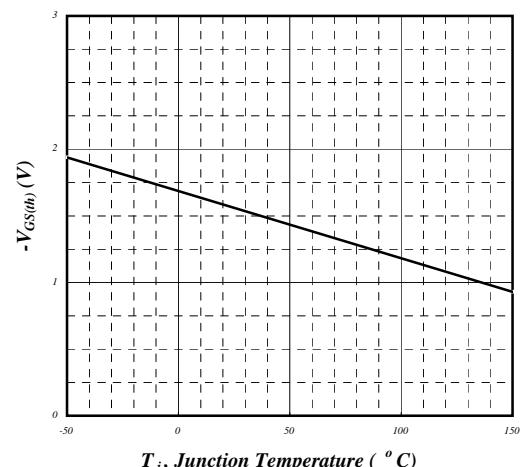



Fig 6. Gate Threshold Voltage v.s. Junction Temperature




# AP4407GM

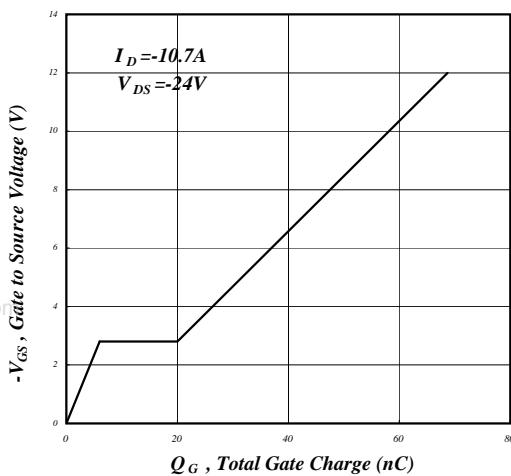


**Fig 7. Gate Charge Characteristics**

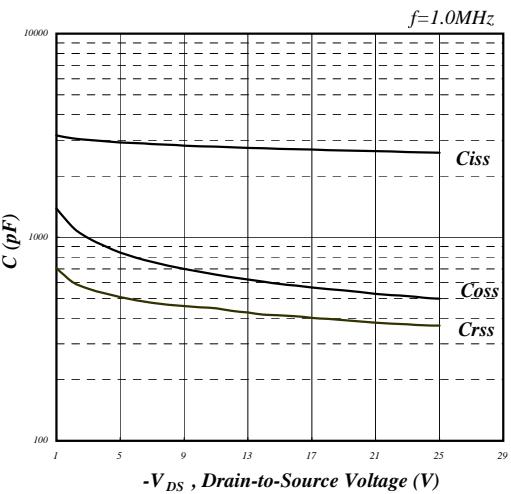


**Fig 8. Typical Capacitance Characteristics**

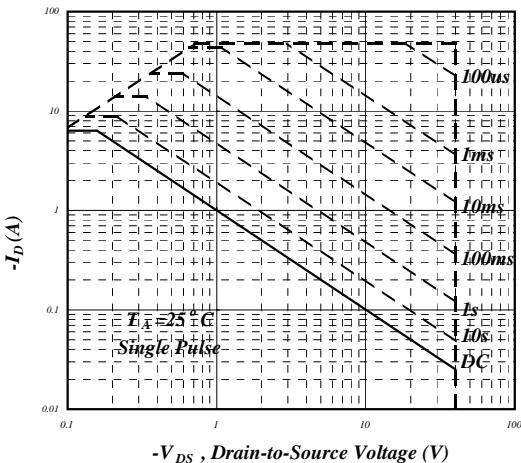


**Fig 9. Maximum Safe Operating Area**

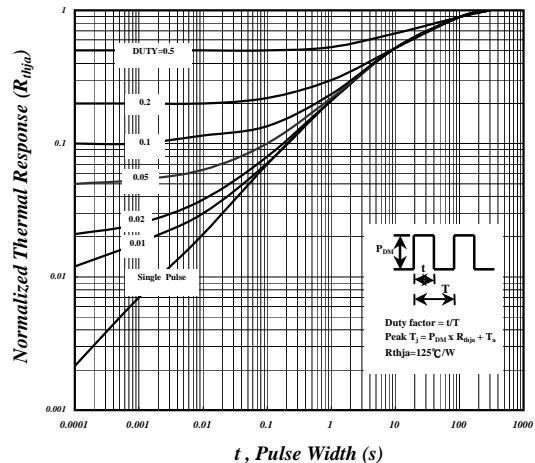

**Fig 10. Effective Transient Thermal Impedance**

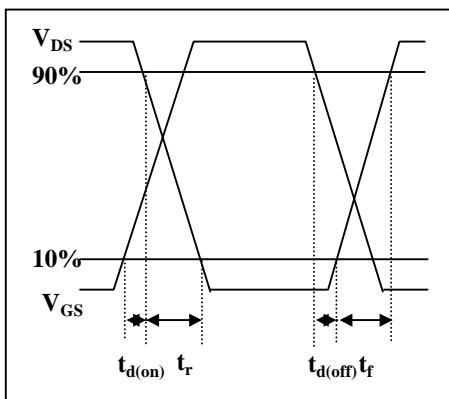

**Fig 11. Switching Time Waveform**

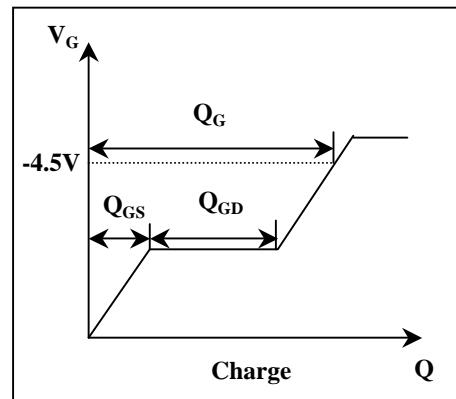

**Fig 12. Gate Charge Waveform**