

Resettable Fuse PTC SMD0805 Series

Features

RoHS Compliant & Halogen Free

faster tripping, 0805 Dimension, Surface mountable, Solid state

Operation Current: 0.05A~1.10A


Maximum Voltage: 6V~24Vdc

Operating Temperature: -40°C to +85°C

Agency recognition: 



Dimensions(2012mm/ 0805 mils) Unit: mm

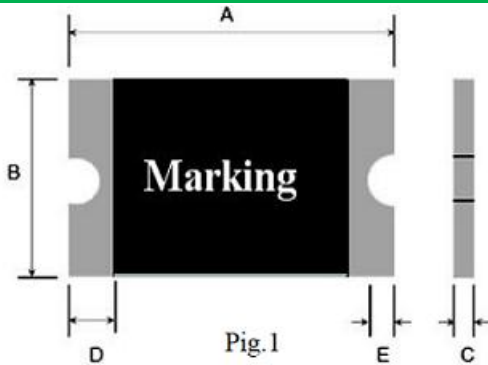

Terminal pad materials : Tin-Plated Nickle-copper
Terminal pad solderability : Meets EIA specification
RS 186-9E and ANSI/J-STD-002 Category 3.

Part number	Marking	A		B		C		D	E	Certification		Delivery Time	
		Min	max	Min	Max	Min	Max	Min	Min	UL	TUV	in stock	Produce
JK-SMD0805-005	1	2.00	2.20	1.20	1.50	0.45	1.00	0.20	0.1	√	√	3days	18days
JK-SMD0805-010	1	2.00	2.20	1.20	1.50	0.40	1.00	0.20	0.1	√	√	3days	18days
JK-SMD0805-010-24	1	2.00	2.20	1.20	1.50	0.40	1.00	0.20	0.1	√	√	3days	18days
JK-SMD0805-020	2	2.00	2.20	1.20	1.50	0.40	1.00	0.20	0.1	√	√	3days	18days
JK-SMD0805-025	2	2.00	2.20	1.20	1.50	0.40	1.00	0.20	0.1	√	√	3days	18days
JK-SMD0805-030	3	2.00	2.20	1.20	1.50	0.30	1.00	0.20	0.1	√	√	3days	18days
JK-SMD0805-035	3	2.00	2.20	1.20	1.50	0.30	1.00	0.20	0.1	√	√	3days	18days
JK-SMD0805-050	5	2.00	2.20	1.20	1.50	0.40	0.80	0.20	0.1	√	√	3days	18days
JK-SMD0805-075	7	2.00	2.20	1.20	1.50	0.50	1.20	0.20	0.1	√	√	3days	18days
JK-SMD0805-100	0	2.00	2.20	1.20	1.50	0.50	1.20	0.20	0.1	√	√	3days	18days
JK-SMD0805-110	0	2.00	2.20	1.20	1.50	0.50	1.20	0.20	0.1	√	√	3days	18days

Electrical characteristics(25°C)

Part Number	I _{Hold}	I _{Trip}	V _{max}	I _{max}	P _d Max	Maximum Time to Trip		Resistance (Ω)		Certification		Delivery Time	
	(A)	(A)	DC	A	W	Current (A)	Time (S)	R _{imin}	R _{1max}	UL	TUV	in stock	Produce
JK-SMD0805-005	0.05	0.15	24V	100A	0.5	0.5	1.50	1.50	20.0	√	√	3days	18days
JK-SMD0805-010	0.10	0.30	15V	100A	0.5	0.5	1.50	1.00	6.00	√	√	3days	18days
JK-SMD0805-010-24	0.10	0.30	24V	40A	0.5	1.5	1.00	6.00	6.00	√	√	3days	18days
JK-SMD0805-020	0.20	0.50	9V	100A	0.5	8.0	0.02	0.50	3.50	√	√	3days	18days
JK-SMD0805-025	0.25	0.50	6V	100A	0.5	8.0	0.02	0.45	3.20	√	√	3days	18days
JK-SMD0805-030	0.30	0.70	6V	100A	0.5	8.0	0.10	0.25	2.00	√	√	3days	18days
JK-SMD0805-035	0.35	0.75	6V	100A	0.5	8.0	0.10	0.25	1.20	√	√	3days	18days
JK-SMD0805-050	0.50	1.00	6V	100A	0.6	8.0	0.10	0.15	0.85	√	√	3days	18days
JK-SMD0805-075	0.75	1.50	6V	100A	0.6	8.0	0.20	0.09	0.385	√	√	3days	18days
JK-SMD0805-100	1.00	1.95	6V	100A	0.6	8.0	0.30	0.06	0.23	√	√	3days	18days
JK-SMD0805-110	1.10	2.20	6V	100A	0.6	8.0	0.30	0.06	0.21	√	√	3days	18days

I_{hold} = Hold Current. Maximum current device will not trip in 25°C still air.

I_{trip} = Trip Current. Minimum current at which the device will always trip in 25°C still air.

V_{max} = Maximum operating voltage device can withstand without damage at rated current (I_{max}).

I_{max} = Maximum fault current device can withstand without damage at rated voltage (V_{max}).

P_d = Maximum power dissipation when device is in the tripped state in 25°C still air environment at rated voltage.

R_{imin/max} = Minimum/Maximum device resistance prior to tripping at 25°C.

R_{1max} = Maximum device resistance is measured one hour post reflow.

For your download speed,we just uploaded a simple SMD0805 datasheet

If you need our detailed SMD0805 datasheet,Pls email us for a request

Our email is : sales@huaandz.com or abc0734@126.com