


Frequency Doubler

Features

- Input 5 2400 MHz
- Output 10 4800 MHz
- Input Drive Level = 23 dBm (nominal)
- Hermetically-Sealed Package

Description

The FD25H is a passive bridge diode frequency doubler, designed for use in the high volume commercial and test equipment applications. The design utilizes Schottky bridge quad diodes and broadband baluns to attain excellent performance. The use of high temperature solder and welded assembly processes used internally makes it ideal for use in semi-automated and automated assembly. Environmental screening available to MIL-STD-883, MIL-STD-202, or MIL-DTL-28837, consult factory.

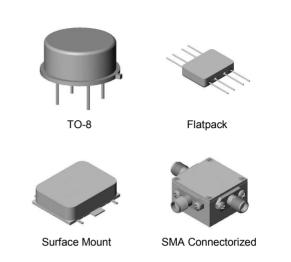

Electrical Specifications: $Z_0 = 50 \Omega$, $P_{IN} = 23 \text{ dBm}$

Parameter	Test Conditions Input Frequency (MHz)	Units	Typical	Guaranteed	
			+25°C	+25°C	-54°C - +85°C ¹
SSB Conversion Loss (max.)	5 - 2400	dB	12.0	13.5	13.8
Fundamental Suppression (min.)	5 - 1000 1000 - 2000 2000 - 2400	dBc	35 25 20	25 20 16	24 19 15
Third Harmonic Suppression	5 - 500 500 - 2400	dBc	40 35	30 25	29 24
Input VSWR	5 - 2400	ratio	1.5:1	_	_

1. The FD25HC specification limits apply at 0°C to +50°C.

Ordering Information

Part Number	Package		
FD25H	TO-8		
FD25HC	SMA Connectorized		
SFD25H	Surface Mount		
MAUC-010499-SFD25H	Surface Mount Screened		

Absolute Maximum Ratings

Parameter	Absolute Maximum		
Peak Input Power	27.6 dBm @ +25⁰C 25.0 dBm @ +100⁰C		
Peak Input Current	50 mA DC		
Operating Temperature	-54°C to +100°C		
Storage Temperature	-65°C to +100°C		

1

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit <u>www.macom.com</u> for additional data sheets and product information.







Frequency Doubler

Rev. V4

Typical Performance Curves

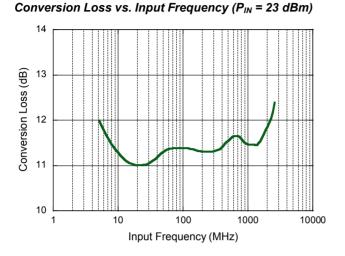



Input VSWR vs. Input Frequency (P_{IN} = 23 dBm)

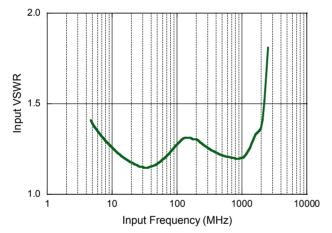

16 15 14 13 12 14 13 12 14 10 16 18 20 22 24 26 Input Power (dBm)

Conversion Loss vs. Input Power



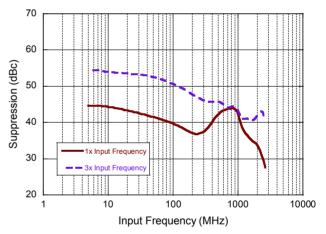





Frequency Doubler

Rev. V4

Outline Drawing*: TO-8

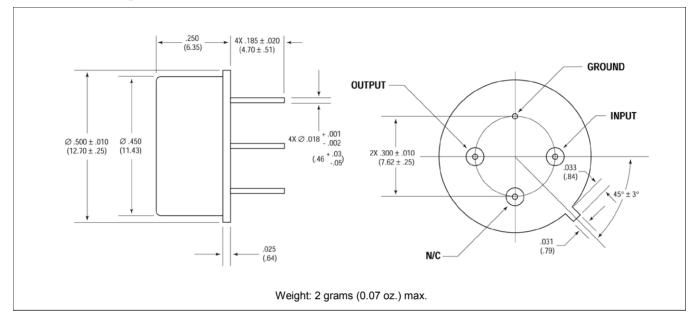

Outline Drawing*: SMA Connectorized

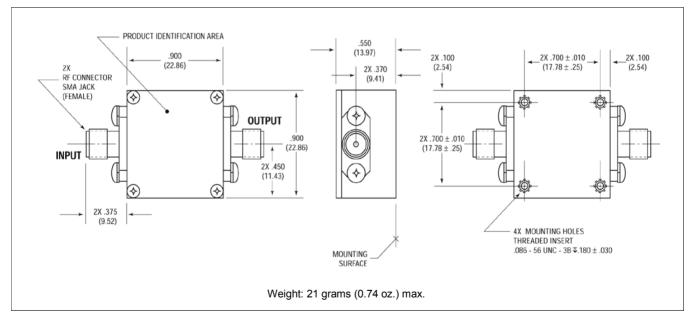

- * Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.
- 3


MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit <u>www.macom.com</u> for additional data sheets and product information.




Frequency Doubler

Rev. V4

Outline Drawing*: Flatpack

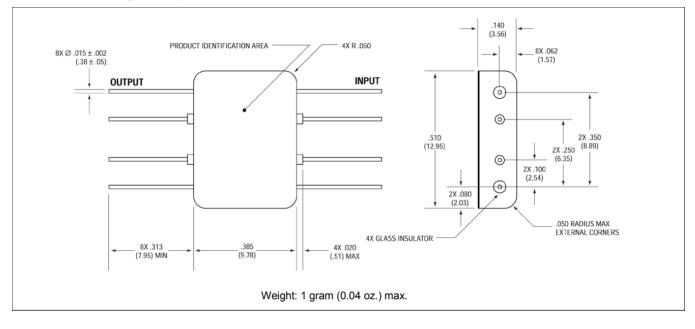

Outline Drawing*: Surface Mount

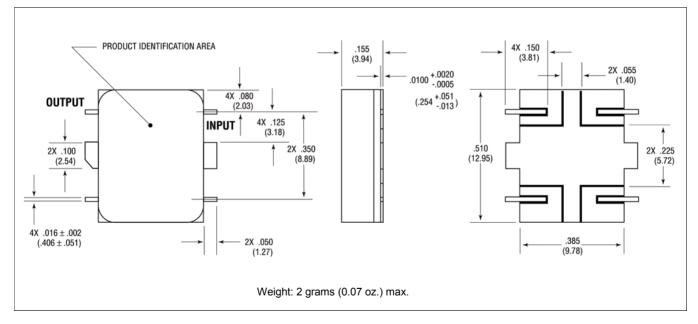

- * Dimensions are inches (millimeters) ±0.015 (0.38) unless otherwise specified.
- 4

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit <u>www.macom.com</u> for additional data sheets and product information.

Frequency Doubler

Rev. V4

MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.



⁵

MACOM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit <u>www.macom.com</u> for additional data sheets and product information.