

LM032XMBL

- 20 characters x 2 lines
 - Controller LSI HD44780 built-in (See page 115).
 - +5V single power supply

MECHANICAL DATA (Nominal Dimensions)

Module size 116W x 39H x 10.5T (max) mm
 Effective display area 83W x 18.6H mm
 Character size (5 x 7 dots) 3.2W x 4.85H mm
 Character pitch 3.7 mm
 Dot size 0.6W x 0.65H mm
 Weight about 50g

ABSOLUTE MAXIMUM RATINGS

	min	max
Power supply for logic (VDD - VSS)	0	6.5 V
Power supply for LCD drive (VDD - VO).....	0	6.5 V
Input Voltage (Vi)	VSS	VDD V
Operating temperature (Ta)	0	40°C
Storage temperature (Tstg)	-20	60°C

ELECTRICAL CHARACTERISTICS

T_a = 25°C, VDD = 5.0V ± 0.25V

Input "high" voltage (ViH)	2.2V min
Input "low" voltage (ViL)	0.6V max
Output "high" voltage (VOH) (-IOH = 0.2mA)	2.4V min
Output "low" voltage (VOL) (IOL = 1.2mA)	0.4V max
Power supply current (IDD) (VDD = 5.0V)	2.0mA typ

Power supply for LCD drive (recommended)

Range of VDD - VO	1.5 ~ 5.25V
T _a = 0°C	4.6V typ
T _a = 25°C	4.4V typ
T _a = 40°C	4.2V typ

Internal Pin Connection

Pin No	Symbol	Level	Function
1	VSS	-	0V +5V -
2	VDD	-	
3	V0	-	
4	RS	H/L	L : Instruction code input H : Data input
5	R/W	H/L	L : Data read (LCD \leftrightarrow MPU) H : Data write (LCD \leftrightarrow MPU)
6	E	H, H/L	Enable signal
7	DB0	H/L	
8	DB1	H/L	
9	DB2	H/L	
10	DB3	H/L	
11	DB4	H/L	
12	DB5	H/L	
13	DB6	H/L	
14	DB7	H/L	

Note:

Notes :
In the HD44780, the data can be sent in either 4-bit 2-operation or

8-bit 1-operation so that it can interface to both 4- and 8-bit MPU's.

(1) When interface data is 4-bits long, data is transferred using only 4 buses of DB4 ~ DB7 and DB0 ~ DB3 are not used. Data transfer between the HD44780 and the MPU completes when 4-bit data is transferred twice. Data of the higher order 4-bits (contents of DB4 ~ DB7 when interface data is 8-bits long) is transferred first and then lower order 4-bits (contents of DB0 ~ DB3 when interface data is 8-bits long).

(2) When interface data is 8-bits long, data is transferred using 8 data buses of DB8 ~ DB7.

Display Pattern

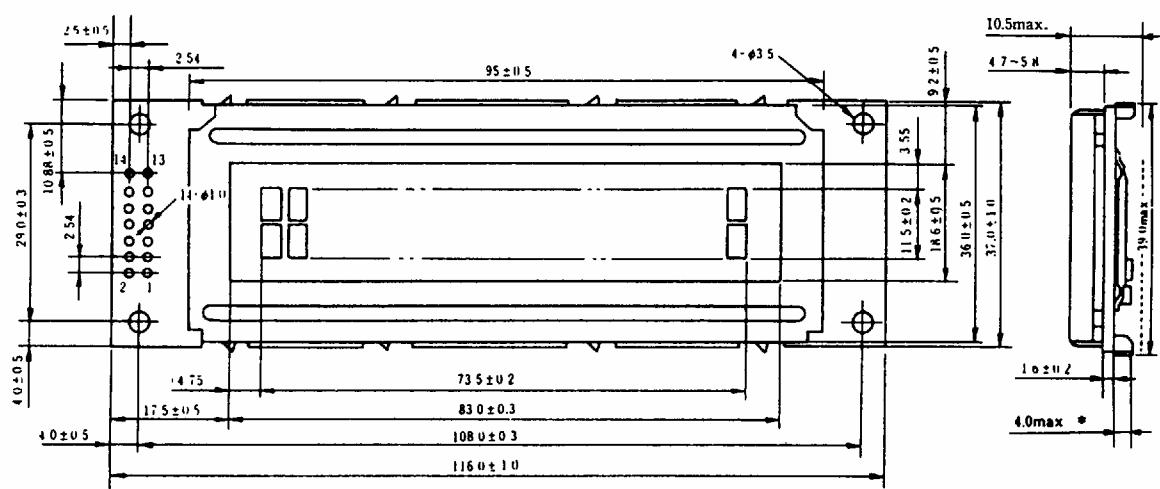
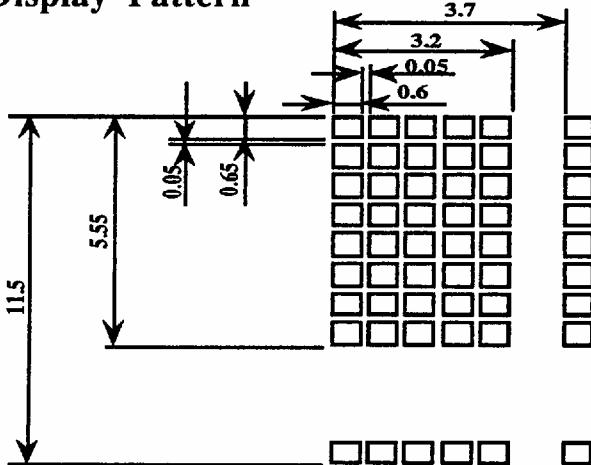
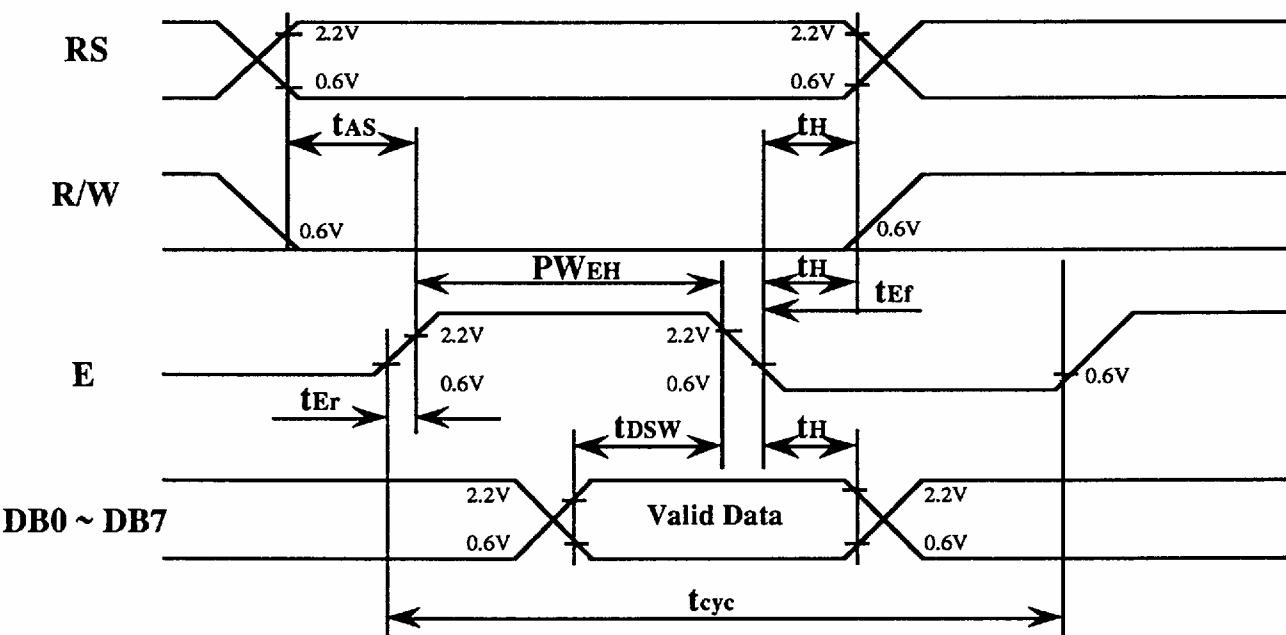
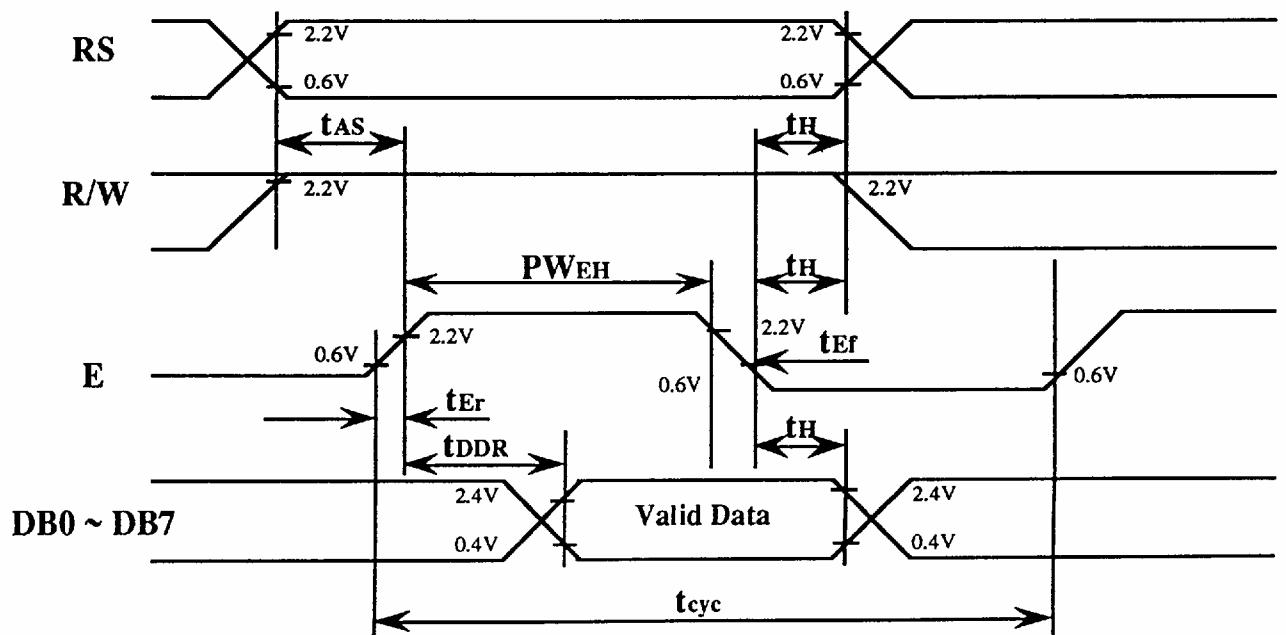



Fig. 2 External dimensions

Interface Timing

Item	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Enable cycle time	t_{cyc}	Fig. 5, Fig. 6	1.0	-	-	μs
Enable pulse width	$PWEH$	Fig. 5, Fig. 6	450	-	-	ns
Enable rise/fall time	t_{Er}, t_{Ef}	Fig. 5, Fig. 6	-	-	25	ns
RS, R/W set up time	t_{AS}	Fig. 5, Fig. 6	140	-	-	ns
Data delay time	t_{DDR}	Fig. 6	-	-	320	ns
Data set up time	t_{DSW}	Fig. 5	195	-	-	ns
Hold time	t_H	Fig. 5, Fig. 6	20	-	-	ns


Fig. 5 : Interface Timing (data write)

Fig. 6 : Interface Timing (data read)

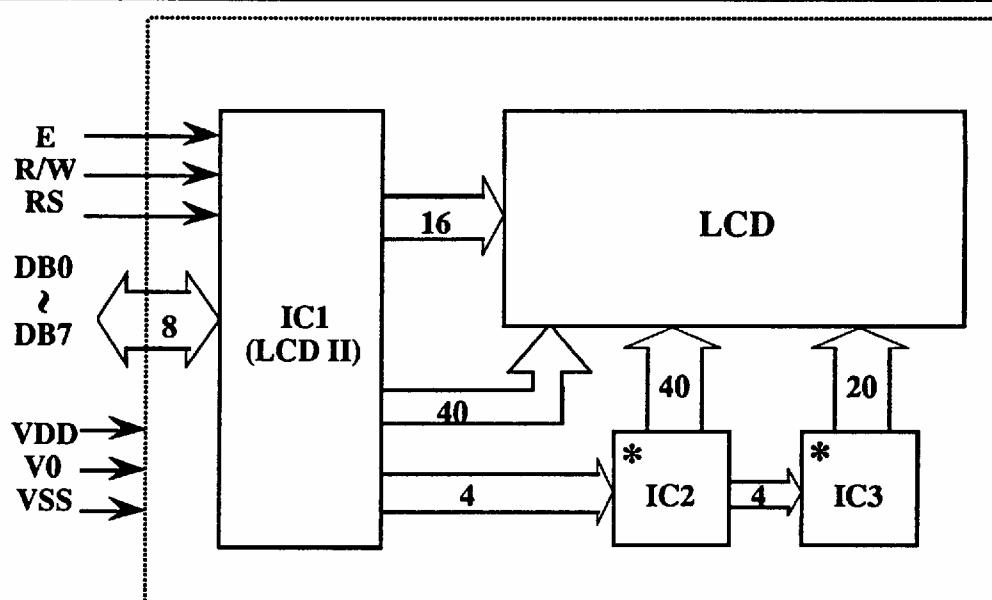
Block Diagram



* HD44100 or equivalent

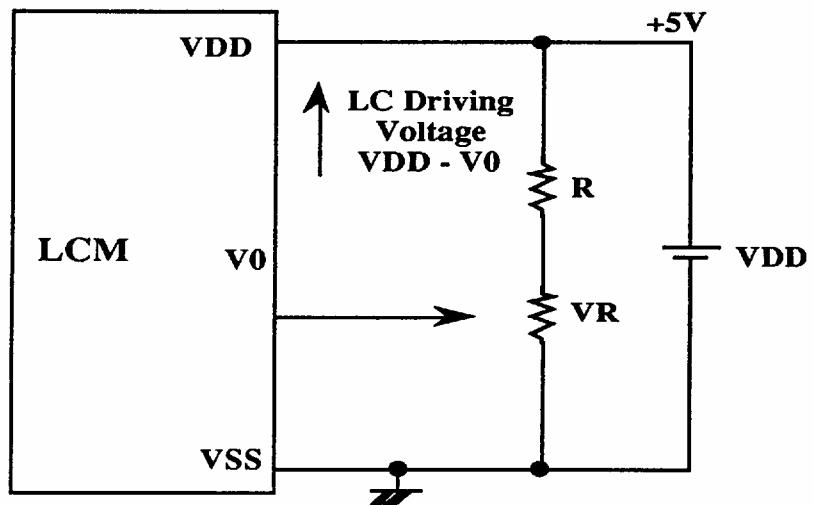Power Supply



$VDD - V0$: LC Driving Voltage (1.5 ~ 5.25V)

VR : $10K\Omega \sim 20K\Omega$

R : Value must be fit for $VDD - V0 \geq 1.5V$