

2SC503

2SC504

SILICON NPN EPITAXIAL TYPE (PCT PROCESS)

9097250 TOSHIBA (DISCRETE/OPTO)

56C 07409

D T-35-15

Unit in mm

HIGH FREQUENCY AMPLIFIER APPLICATIONS.

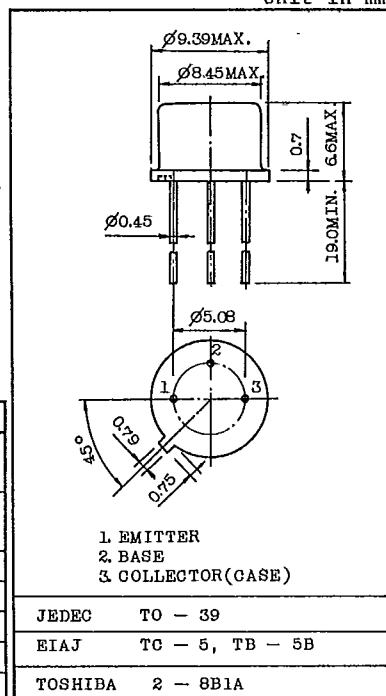
HIGH SPEED SWITCHING APPLICATIONS.

FEATURES:

- High Transition Frequency : $f_T=80\text{MHz}$ (Typ.)
- High Breakdown Voltage
 - : $V_{CE0}=80\text{V}$ (2SC503)
 - : $V_{CE0}=60\text{V}$ (2SC504)
- Complementary to 2SA503 and 2SA504.

MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage	2SC503	V_{CB0}	100	V
	2SC504		80	
Collector-Emitter Voltage	2SC503	V_{CE0}	80	V
	2SC504		60	
Emitter-Base Voltage		V_{EB0}	5	V
Collector Current		I_C	600	mA
Base Current		I_B	100	mA
Collector Power Dissipation	$T_a=25^\circ\text{C}$	P_C	800	mW
	$T_c=25^\circ\text{C}$		6	
Junction Temperature		T_j	175	$^\circ\text{C}$
Storage Temperature Range		T_{stg}	-65~175	$^\circ\text{C}$



Weight : 1.13g

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$)

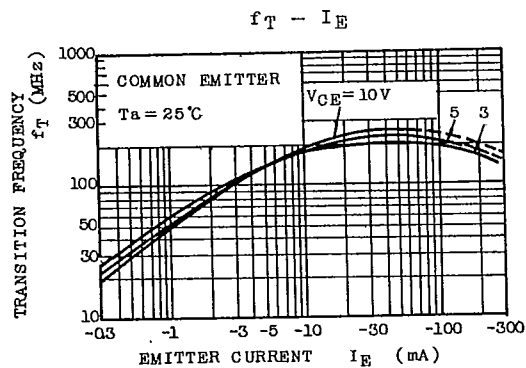
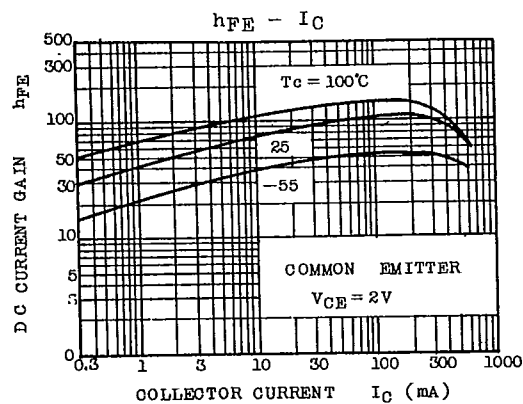
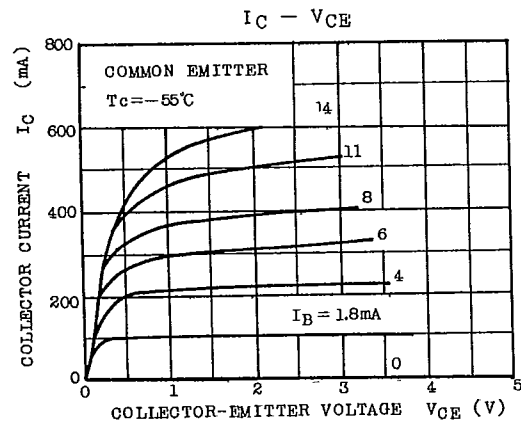
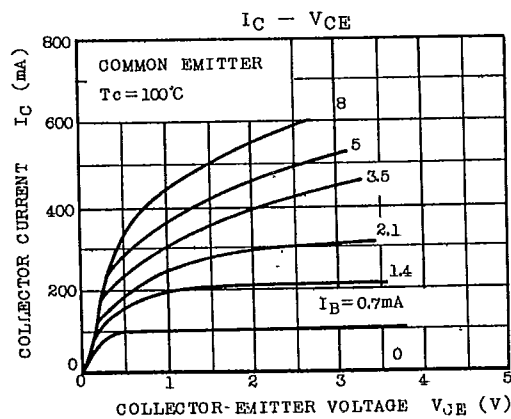
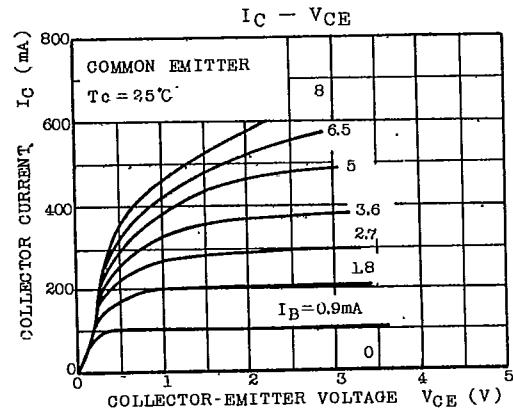
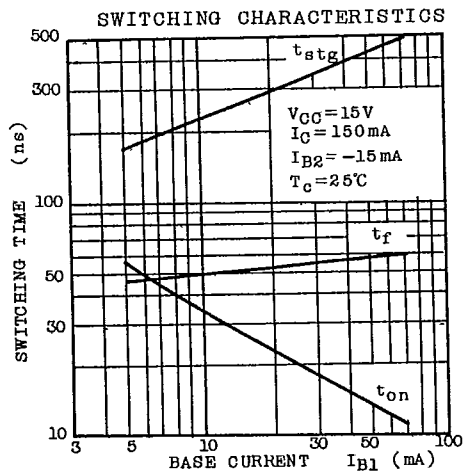
CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	2SC503	I_{CB0}	$V_{CB}=80\text{V}, I_E=0$	-	-	0.5	μA
	2SC504		$V_{CB}=60\text{V}, I_E=0$	-	-	0.5	
Emitter Cut-off Current		I_{EB0}	$V_{EB}=5\text{V}, I_C=0$	-	-	1.0	μA
DC Current Gain		h_{FE} (Note)	$V_{CE}=2\text{V}, I_C=150\text{mA}$	30	-	300	
Saturation Voltage	Collector-Emitter	$V_{CE(sat)}$	$I_C=150\text{mA}, I_B=15\text{mA}$	-	0.06	0.5	V
	Base-Emitter	$V_{BE(sat)}$	$I_C=150\text{mA}, I_B=15\text{mA}$	-	0.8	1.5	
Transition Frequency		f_T	$V_{CE}=2\text{V}, I_C=150\text{mA}$	50	80	-	MHz
Collector Output Capacitance		C_{ob}	$V_{CB}=10\text{V}, I_E=0, f=1\text{MHz}$	-	13	30	pF
Base Intrinsic Resistance		$r_{bb'}$	$V_{CE}=10\text{V}, I_E=-1\text{mA}, f=30\text{MHz}$	-	16	25	Ω
Switching Time	Turn-on Time	t_{on}		-	40	-	ns
	Storage Time	t_{stg}		-	450	-	
	Fall Time	t_f		-	100	-	

Note: h_{FE} Classification 0 : 30~90, Y : 50~150, GR : 100~300

TOSHIBA CORPORATION

9097250 TOSHIBA (DISCRETE/OPTO)

56C 07410 D T-35-15

2SC503 • 2SC504

TOSHIBA CORPORATION

9097250 TOSHIBA (DISCRETE/OPTO)

56C 07411 DT-35-15

2SC503·2SC504